

PLANTING NOTES:

- ALL QUANTITIES LISTED IN THE DRAWINGS ARE FOR INFORMATION ONLY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY ALL QUANTITIES AND TO PROVIDE ALL MATERIALS NECESSARY FOR FULL COVERAGE IN ALL PLANTING AREAS AS SPECIFIED ON THE DRAWINGS. ANY DISCREPANCY SHOULD BE REPORTED TO THE OWNER.
- ALL PLANTS SHOULD BE IN ACCORDANCE WITH ANSI Z60.1 -2014, AMERICAN STANDARD FOR NURSERY STOCK PUBLICATION, APPROVED APRIL 14, 2014.
- CALIPER SIZE OF CANOPY TREES ARE TO BE MEASURED PER LOCAL CITY LANDSCAPE ORDINANCE.
- ALL PLANT MATERIAL SHALL CONFORM TO THE SIZE SPECIFICATIONS (CALIPER, HEIGHT AND SPREAD) GIVEN IN THE PLANT SCHEDULE AND SHALL BE NURSERY GROWN UNLESS SPECIFIED OTHERWISE.
- ANY PLANT SUBSTITUTION SHALL BE APPROVED BY LANDESIGN PRIOR TO PURCHASE.
- SIZES LISTED ARE MIN. AND REFER TO HEIGHT, UNLESS OTHERWISE SPECIFIED.
- LANDSCAPE CONTRACTOR SHALL STAKE OUT LOCATIONS OF ALL TREES TO BE PLANTED FOR REVIEW BY LANDESIGN PRIOR TO INSTALLING. LANDESIGN RESERVES THE RIGHT TO ADJUST TREE LOCATIONS IN THE FIELD AS NECESSARY.
- SHRUB/GROUNDCOVER BEDS SHALL BE STAKED FOR REVIEW BY LANDESIGN/OWNER'S REPRESENTATIVE PRIOR TO EXCAVATION AND OR BED PREPARATION.
- LANDSCAPE CONTRACTOR SHALL INSTALL STEEL EDGING BETWEEN PLANTING BEDS AND LAWNS, OR AS SHOWN IN DETAILS.
- LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE LOCATION OF ALL UNDERGROUND UTILITIES, PIPES, STRUCTURES, AND LINE RUNS IN THE FIELD PRIOR TO THE INSTALLATION OF ANY PLANT MATERIAL.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ADVISE LANDESIGN OF ANY CONDITION FOUND ON THE SITE WHICH PROHIBITS INSTALLATION AS SHOWN ON THE DRAWINGS.
- LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR ALL COORDINATION WITH OTHER CONTRACTORS ON SITE AS REQUIRED TO ACCOMPLISH ALL PLANTING OPERATIONS.
- ALL PLANT MATERIAL SHALL BE MAINTAINED IN A HEALTHY GROWING CONDITION AND MUST BE REPLACED WITH PLANT OF SAME VARIETY AND SIZE IF DAMAGED, DESTROYED, DEAD AND/OR REMOVED.
- LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR FINE GRADING AND REMOVAL OF DEBRIS PRIOR TO PLANTING IN ALL AREAS.
- FINAL FINISHED GRADING SHALL BE REVIEWED BY LANDESIGN. CONTRACTOR IS RESPONSIBLE FOR ANY ADDITIONAL TOPSOIL REQUIRED TO CREATE A SMOOTH CONDITION SUITABLE FOR PLANTING.
- TREES OVERHANGING INTO THE PUBLIC R.O.W. SHALL HAVE A MINIMUM CLEAR TRUNK HEIGHT OF FOURTEEN(14) FEET OVER STREETS, DRIVE AISLES, ALLEYS AND FIRE LANES. TREES OVERHANGING PRIVATE STREETS, WALKS, AND /OR PARKING LOTS SHALL HAVE A MINIMUM CLEAR TRUNK HEIGHT OF SEVEN (7) FEET.
- LANDSCAPE CONTRACTOR IS REQUIRED TO PERFORM A TREE PIT PERCOLATION TEST FOR EACH TREE PIT PRIOR TO INSTALLATION. IF TREE PIT DOES NOT DRAIN WITHIN A 24-HOUR PERIOD, THE CONTRACTOR WILL BE REQUIRED TO PROVIDE A GRAVEL SUMP, FILTER FABRIC AND STAND PIPE. ALL TREE PIT SUMPS SHALL BE INCLUDED IN THE CONTRACTOR'S BASE BID AS A UNIT PRICE AND PROVIDE AS A DEDUCT ALTERNATE PER TREE PIT SUMPS NOT REQUIRED TO BE INSTALLED.
- LANDSCAPE CONTRACTOR IS RESPONSIBLE TO REVIEW SITE ENVIRONMENTAL CONDITIONS PRIOR TO AND DURING INSTALLATION OF PLANT MATERIAL. ANY DISCREPANCIES OR CONCERNS BETWEEN THE ENVIRONMENTAL SITE CONDITIONS (I.E. SOIL TYPE, WATER, CLIMATE, WIND, SUN EXPOSURE ETC.) AND THE PLANT MATERIAL SPECIFIED WITHIN THE DRAWING SHALL BE BROUGHT TO THE ATTENTION OF LANDESIGN AND/OR OWNER, AND SHALL BE DONE SO IN WRITING. CONTRACTOR SHALL PROVIDE SUGGESTED SOLUTIONS FOR ALTERNATIVE PLANT MATERIAL PROPOSED FOR SUBSTITUTION. LANDESIGN TO REVIEW CONDITIONS AND INFORMATION SUBMITTED BY CONTRACTOR AND WILL ISSUE DIRECTIVE. SHOULD PLANT MATERIAL DIE BECAUSE OF ENVIRONMENTAL CONDITIONS DESCRIBED ABOVE, THE LANDSCAPE CONTRACTOR ASSUMES ALL WARRANTY AND GUARANTEE OF THE PLANT MATERIAL INSTALLED.
- ALL NEW PLANTING AREAS SHALL BE BACKFILLED WITH PLANTING SOIL THAT IS A MIXTURE OF 40-50% IMPORTED UNSCREENED TOPSOIL, 40-45% COARSE SAND, AND 10% COMPOST. FINAL TESTED ORGANIC MATTER SHALL BE BETWEEN 2.75 AND 4% (BY DRY WEIGHT). BACKFILL SHALL BE TO A DEPTH OF 18" FOR SHRUB AND GROUNDCOVER ZONES AND 36" FOR TREE PITS.
- AFTER PLANTING SOIL MIXES ARE INSTALLED IN PLANTING BED AREAS AND JUST PRIOR TO THE INSTALLATION OF SHRUB OR GROUNDCOVER PLANTINGS, SPREAD 3-4 INCHES OF COMPOST OVER THE BEDS AND ROTO TILL INTO THE TOP 8 INCHES OF THE PLANTING SOIL. THIS WILL RAISE GRADES SLIGHTLY ABOVE THE FINISHED GRADES, IN ANTICIPATION GRADES WILL SETTLE WITHIN A FEW MONTHS AFTER INSTALLATION AS COMPOST BREAKS DOWN.
- IN ALL EXISTING PLANTING AREAS DESIGNATED TO RECEIVE NEW PLANTINGS, SPREAD 3-4 INCHES OF COMPOST OVER THE BEDS AND ROTO TILL INTO THE TOP 8 INCHES OF THE PLANTING SOIL. THIS WILL RAISE THE GRADES SLIGHTLY ABOVE THE FINISHED GRADES, IN ANTICIPATION GRADES WILL SETTLE WITHIN A FEW MONTHS AFTER INSTALLATION AS COMPOST BREAKS DOWN. IN NO CASE WILL THIS BE PERFORMED WHERE IT MAY NEGATIVELY IMPACT THE HEALTH OF ADJACENT, EXISTING PLANT MATERIALS WHICH ARE DESIGNATED TO REMAIN.
- LANDSCAPE CONTRACTOR TO WARRANTY ALL PLANT MATERIALS FOR A PERIOD OF ONE YEAR. THE CONTRACTOR AGREES TO REPLACE DEFECTIVE WORK AND DEFECTIVE PLANTS, AND THAT THE OWNER'S REPRESENTATIVE SHALL MAKE THE FINAL DETERMINATION IF PLANTS MEET THE REQUIRED SPECIFICATIONS OR THAT PLANTS ARE DEFECTIVE. PLANTS DETERMINED TO BE DEFECTIVE SHALL BE REMOVED IMMEDIATELY UPON NOTIFICATION BY THE OWNER'S REPRESENTATIVE AND REPLACED WITHOUT COST TO THE OWNER, AS SOON AS WEATHER CONDITIONS PERMIT AND WITHIN THE SPECIFIED PLANTING PERIOD. THE REPLACED MATERIALS SHALL ALSO RECEIVE A WARRANTY PERIOD OF ONE YEAR WHICH STARTS AT THE DATE OF INSTALLATION. BULBS, ANNUAL FLOWERS, AND SEASONAL COLOR PLANTS SHALL ONLY BE WARRANTED FOR THE PERIOD OF THE EXPECTED BLOOM OR PRIMARY DISPLAY.

PLANTERS/POTS/SEASONAL PLANTING NOTES:

- SOIL SHOULD BE NUTRIENT-RICH, MOISTURE CONTAINING PLANTING MEDIUM AND BE A MINIMUM 18" DEPTH FOR SEASONALS, PERENNIALS AND SMALL SHRUBS; MINIMUM 36" DEPTH FOR ALL TREES.
- A LAYER OF RIVER ROCK SHALL BE PLACED IN THE BASE OF EACH PLANTER POT TO A MINIMUM 6" DEPTH OR AS ALLOWABLE BY REQUIRED SOIL DEPTH. PLACE FILTER FABRIC BETWEEN SOIL MEDIUM AND RIVER ROCK AND SOIL MEDIUM AND PLANTER EDGES. OVERLAP FABRIC 6" MINIMUM TO MINIMIZE SOIL WASH.
- PLANTERS POTS WHICH DO NOT RECEIVE IRRIGATION SHALL BE HAND-WATERED. HAND WATERING SHOULD OCCUR MINIMUM 2 TIMES PER WEEK DURING COOLER AND RAINY SEASONS AND INCREASED TO EVERY 2-3 DAYS DURING HOT/DRY WEATHER. ALWAYS CHECK SOIL 6" BELOW SURFACE FOR SATURATION PRIOR TO WATERING TO PREVENT OVERWATERING/DROWNING OF PLANT MATERIAL.
- WHEN APPLICABLE, PLANTS TO REMAIN IN CONTAINERS FOR DURATION OF SEASON ARE SHOWN IN THE "PERMANENT" LAYOUT. EACH SEASON WILL HAVE ITS OWN PLANT MATERIAL. SOME OF WHICH MAY LAST ALL YEAR. ROTATE IN THE PLANTS NOTED FOR EACH SEASON.
- IF PLANT MATERIAL DIES DURING A SEASON AND IS EXPECTED TO REMAIN FOR AN ADDITIONAL SEASON, CONTRACTOR IS TO REPLACE AT TIME OF NEXT SEASONAL ROTATION.
- CONTACT LANDESIGN FOR ANY REQUIRED SUBSTITUTIONS.
- ALL PLANTS SHOULD BE FULL AT TIME OF INSTALLATION AND COVER 75% OF POT SURFACE AREA.
- AVOID PLANTING IN THE ROOT ZONE OF ANY PERMANENT TREES, SHRUBS, OR PERENNIALS.
- SEASONAL PLANTS SHOULD BE REMOVED FOLLOWING THE FIRST MAJOR FROST DIEBACK AND REPLACED WITH EVERGREEN BOUGHS OR OTHER OWNER APPROVED WINTER DECOR. TREES, SHRUBS AND PERENNIALS SHOULD REMAIN IN THE CONTAINERS YEAR ROUND AND REPLACED ONLY AS NECESSARY.

IRRIGATION NOTES:

- A FULLY AUTOMATED IRRIGATION SYSTEM PROVIDING 100% COVERAGE SHALL BE PROVIDED FOR ALL PLANTING AREAS, UNLESS NOTED OTHERWISE. SYSTEM SHALL BE IN OPERATION PRIOR TO INSTALLATION OF ANY PLANT MATERIAL OTHER THAN CANOPY TREES.
- ALL PLANTING BEDS/ SHRUB AND GROUNDCOVER AREAS TO BE IRRIGATED WITH EITHER 12" SPRAY POP-UPS AND/OR A LANDSCAPE DRIP-LINE SYSTEM, UNLESS NOTED OTHERWISE.
- ALL PLANTER POTS AND RAISED PLANTERS TO BE IRRIGATED WITH MICRO SPRAY SPRINKLER HEADS.
- IRRIGATION SYSTEM IS DESIGN/BUILD. CONTRACTOR TO PROVIDE DRAWINGS AND CUT SHEETS OF ALL COMPONENTS.
- PROVIDE AS-BUILT DRAWINGS OF IRRIGATION AFTER INSTALLATION.

MATERIALS + PAVING NOTES:

- ALL MATERIALS, CONSTRUCTION METHODS, WORKMANSHIP, EQUIPMENT SERVICES AND TESTING FOR ALL IMPROVEMENTS SHALL BE IN ACCORDANCE WITH THE PROJECT DOCUMENTS AND THE GOVERNING AUTHORITIES' REQUIREMENTS. IN THE EVENT OF A CONFLICT BETWEEN THE PROJECT DOCUMENTS AND THE GOVERNING AUTHORITIES' REQUIREMENTS, THE MORE STRINGENT SHALL APPLY.
- SUBGRADE PREPARATION, PAVEMENT STRENGTH AND THICKNESS SHALL BE IN ACCORDANCE WITH THE GEOTECHNICAL REPORT PREPARED FOR THIS PROJECT.
 - PROOF-ROLL SUBGRADE: PRIOR TO PREPARATION OF THE SUBBASE, THE SUBGRADE SHALL BE PROOF-ROLLED WITH HEAVY PNEUMATIC EQUIPMENT. ANY SOFT OR PUMPING AREAS SHALL BE EXCAVATED TO FIRM SUBGRADE AND BACKFILLED AND COMPACTED IN ACCORDANCE WITH THE GEOTECHNICAL REPORT.
 - PAVEMENT SUBGRADE SHALL BE GRADED TO PREVENT PONDING AND INFILTRATION OF EXCESSIVE MOISTURE ON OR ADJACENT TO THE PAVEMENT SUBGRADE.
- THE USE OF "LEVEL UP" SAND UNDER PAVEMENT WILL NOT BE ACCEPTED, UNLESS NOTED OTHERWISE..
- CONCRETE SHALL NOT BE PLACED WHEN THE TEMPERATURE IS BELOW 40 DEGREES FAHRENHEIT AND FALLING, BUT MAY BE PLACED WHEN THE TEMPERATURE IS ABOVE 35 DEGREES FAHRENHEIT AND RISING. THE TEMPERATURE READING SHALL BE TAKEN IN THE SHADE AWAY FROM ARTIFICIAL HEAT.
 - DO NOT PLACE CONCRETE WHILE IT IS RAINING OR WHEN RAIN IS IMMINENT.
- CAST IN PLACE CONCRETE SHALL MEET THE FOLLOWING REQUIREMENTS:
 - MINIMUM 3,000 PSI COMPRESSIVE STRENGTH AT 28 DAYS, UNLESS NOTED OTHERWISE.
 - AGGREGATES: ASTM C33 MAX 3/4" IN SIZE, UNLESS NOTED OTHERWISE
 - SLUMP: 3 TO 5 INCHES
 - AIR CONTENT: 4 TO 6 PERCENT BY VOLUME
- CONCRETE THICKNESS:
 - PEDESTRIAN AREA: 4" THICK, UNLESS NOTED OTHERWISE.
 - ALL OTHER CONCRETE COMPONENTS INSTALL PER SIZE SPECIFIED IN DRAWINGS
- CONCRETE REINFORCING:
 - 4" THICK PAVING: #3s AT 24" SPACING UNLESS NOTED OTHERWISE IN DRAWINGS
 - 6" THICK PAVING: #4s AT 24" SPACING UNLESS NOTED OTHERWISE IN DRAWINGS
 - 8" THICK PAVING: #5s AT 24" SPACING UNLESS NOTED OTHERWISE IN DRAWINGS
 - ALL PAVEMENT REINFORCING BARS SHALL BE GRADE 60 KSI DEFORMED BILLET STEEL BARS, UNCOATED FINISH. SIZE AND SPACING SHALL BE IN ACCORDANCE WITH THE PAVING PLAN AND DETAILS.
 - ALL REINFORCING STEEL AND DOWEL BARS IN PAVEMENT SHALL BE SUPPORTED AND MAINTAINED AT THE CORRECT CLEARANCES BY THE USE OF BAR CHAIRS.
- CONTROL JOINTS (TROWEL OR SAW CUT)
 - TO BE PLACED AS INDICATED ON PLANS AND DETAILS TO A MINIMUM DEPTH OF 1/8 OF CONCRETE THICKNESS.
 - SAW CUT JOINTS TO BE EXECUTED WITHIN 12 HOURS OF CONCRETE PLACEMENT.
 - SAWN JOINTS ARE TO BE TRUE IN ALIGNMENT AND SHALL CONTINUE THROUGH ADJACENT CURBS. RADIAL JOINTS SHALL BE NO SHORTER THAN 18".
 - SAWN JOINTS TO BE CLEANED OF DEBRIS, DIRT, DUST, SCALE, CURING COMPOUND AND CONCRETE, BLOWN DRY AND IMMEDIATELY SEALED. SEALANT MATERIAL SHALL BE SONNEBORN SONOLAC SL2 MULTI-COMPONENT, SELF-LEVELING, ELASTOMERIC POLYURETHANE OR EQUIVALENT. SEALANT COLOR SHALL MATCH PAVEMENT.
- EXPANSION JOINTS
 - PLACE AT A MAXIMUM SPACING OF 30' O.C. AND COORDINATE WITH OVERALL PAVING PATTERN AND COLOR.
 - PROVIDE DOWELS AS SPECIFIED IN DRAWING DETAILS.
 - CONTRACTOR SHALL PREPARE A JOINT LAYOUT AND PROVIDE IT TO THE ENGINEER FOR REVIEW. THE JOINT LAYOUT SHALL BE PROVIDED A MINIMUM OF ONE WEEK PRIOR TO PLACING CONCRETE. PATTERN SHALL BE CAREFULLY DESIGNED BY THE CONTRACTOR TO AVOID IRREGULAR SHAPES. EXPANSION JOINTS SHALL NOT BE LOCATED ALONG VALLEYS IN PAVEMENT.
- ALL CONSTRUCTION JOINTS SHALL BE SAWN. CONCRETE FINISHES TO BE PER DRAWING DETAILS AND SPECIFICATIONS.
 - CONCRETE SHALL BE BROOM FINISHED AND CURED FOR A MINIMUM OF 72 HOURS UNLESS NOTED OTHERWISE.
- BREAKOUTS FOR REMOVAL OF EXISTING PAVEMENT AND CURBS SHALL BE MADE BY FULL DEPTH SAW CUT WHEN ADJACENT TO PROPOSED PAVEMENT AND/OR CURBS.
- PROPOSED PAVEMENT AND/OR CURBS INTENDED TO TIE INTO EXISTING SHALL MATCH SHALL MATCH THE ELEVATION OF EXISTING PAVEMENT AND/OR CURBS.
- CONTRACTOR SHALL REFER TO THE SITE CIVIL, MEP AND IRRIGATION PLANS FOR CONDUIT TO BE INSTALLED UNDER PAVEMENT PRIOR TO COMMENCING PAVEMENT SUBGRADE PREPARATION.
- ALL TESTING SHALL BE PERFORMED BY A QUALIFIED TESTING LABORATORY, EMPLOYED AND PAID DIRECTLY BY THE OWNER. TESTING SHALL BE PERFORMED, AT A MINIMUM, IN ACCORDANCE WITH THE RECOMMENDATIONS IN THE GEOTECHNICAL REPORT. IN THE EVENT THE RESULTS OF THE INITIAL TESTING DO NOT COMPLY WITH THE PLANS AND THE SPECIFICATIONS, SUBSEQUENT TEST NECESSARY TO DETERMINE THE ACCEPTABILITY OF CONSTRUCTION SHALL BE AT THE CONTRACTOR'S EXPENSE. PAVEMENT FOUND TO BE DEFICIENT IN STRENGTH OR THICKNESS SHALL BE REMOVED AND REPLACED SOLELY AT THE EXPENSE OF THE CONTRACTOR.

ACCESSIBILITY NOTES:

- MAX CROSS SLOPE ON PAVED SURFACES SHALL BE 2% MAXIMUM, UNLESS NOTED OTHERWISE.
- MAX RUNNING SLOPE ON PAVED SURFACES SHALL BE 5% MAXIMUM, UNLESS NOTED OTHERWISE.
- ACCESSIBLE PATH OF TRAVEL SHALL BE MAINTAINED FREE OF OVERHANGING OBSTRUCTIONS TO 80" MINIMUM, AND PROTRUDING OBJECTS GREATER THAN 4" PROJECTION FROM WALL AND ABOVE 27" AND LESS THAN 80". CONTRACTOR SHALL VERIFY THAT THERE ARE NO BARRIERS IN THE PATH OF TRAVEL.
- ALL CURB RAMPS SHALL BE BROOM FINISHED PERPENDICULAR TO SLOPE.
- ALL CURB RAMPS SHALL HAVE A 1:12 MAX SLOPE IN THE DIRECTION OF TRAVEL, 2% MAX CROSS SLOPE.
- IT IS THE INTENT OF THE CONTRACT DOCUMENTS TO COMPLY WITH ALL APPROPRIATE FAIR HOUSING ACCESSIBILITY GUIDELINES AND GENERAL NOTES FOR PUBLIC AND COMMON USE FACILITIES. REPORT ANY DISCREPANCIES TO LANDESIGN.

GENERAL NOTES:

- BASE INFORMATION, INCLUDING EXISTING CONDITIONS, TOPOGRAPHY, EXISTING UTILITIES, AND BOUNDARY INFORMATION IS FROM PLANS BY: WALTER L PHILLIPS INC ARCHITECTURAL INFORMATION IS FROM PLANS BY: SKIH ARCHITECTS, TORTI GALLAS + PARTNERS WRITTEN DIMENSIONS PREVAIL OVER SCALED DIMENSIONS. NOTIFY LANDESIGN OF ANY DISCREPANCIES.
- DIMENSIONS ARE TO FACE OF OBJECT, UNLESS NOTED OTHERWISE.
- THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL UNDERGROUND UTILITIES, PIPES, STRUCTURES, AND LINE RUNS IN THE FIELD PRIOR TO CONSTRUCTION. ANY DAMAGE TO NEW AND EXISTING UTILITIES ARE TO BE REPAIRED IMMEDIATELY AT NO ADDITIONAL EXPENSE TO THE OWNER. LANDESIGN ASSUMES NO RESPONSIBILITY FOR ANY UTILITIES NOT SHOWN ON PLANS.
- ALL PROPOSED FINISHED GRADES ARE BASED ON INFORMATION PROVIDED BY THE OWNER'S SURVEY AND OR CIVIL ENGINEER. ANY DISCREPANCIES IN ACTUAL FIELD MEASUREMENTS ARE TO BE REPORTED TO LANDESIGN IMMEDIATELY.
- PRIOR TO COMMENCEMENT OF HARDSCAPE CONSTRUCTION, ALL PIERS, FOOTINGS, AND WALLS ARE TO BE SURVEYED, LAID OUT, AND STAKED IN THE FIELD FOR REVIEW BY LANDESIGN. CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY FOR ANY DEMOLITION, ADJUSTMENTS, OR RECONSTRUCTION OF HARDSCAPE CONSTRUCTION RESULTING FROM UNAUTHORIZED CONSTRUCTION.
- CONTRACTOR IS RESPONSIBLE TO PROVIDE AND INSTALL ALL ITEMS PER DRAWINGS AND SPECIFICATION. NOTIFY LANDESIGN OF ANY MAJOR DISCREPANCIES BETWEEN CONTRACTOR'S VERIFIED QUANTITIES, BID BOOK, AND INTENT OF DRAWING.
- CONTRACTOR IS RESPONSIBLE FOR ALL FINAL QUANTITIES PER DRAWINGS AND SPECIFICATIONS ANY QUANTITIES PROVIDED BY LANDESIGN ARE PROVIDED FOR CONVENIENCE ONLY AND SHALL NOT BE CONSIDERED ABSOLUTE. LANDESIGN SHOULD BE NOTIFIED OF ANY GRADING DISCREPANCIES.
- THE CONTRACTOR SHALL EXAMINE AND BECOME FAMILIAR WITH ALL CONTRACT DOCUMENTS IN THEIR ENTIRETY. SURVEY THE PROJECT AND BECOME FAMILIAR WITH THE EXISTING CONDITIONS AND SCOPE OF WORK. ALL COSTS SUBMITTED SHALL BE BASED ON THOROUGH KNOWLEDGE OF ALL WORK AND MATERIALS REQUIRED ANY DISCREPANCY AND/OR UNCERTAINTY AS TO WHAT MATERIAL OR PRODUCT IS TO BE USED, SHALL BE VERIFIED WITH THE OWNER OR LANDESIGN PRIOR TO BIDDING.
- THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES REQUIRED FOR SAFE EXECUTION AND COMPLETION OF WORK, AND FOR INITIATING, MAINTAINING AND SUPERVISING ALL SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK.
- IN THE EVENT A DISCREPANCY IS FOUND IN THE CONTRACT DOCUMENTS, THE OWNER & LANDESIGN SHALL BE NOTIFIED IMMEDIATELY.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS IN THE FIELD AND NOTIFY LANDESIGN OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION.
- CONTRACTOR SHALL VERIFY ALL MEASUREMENTS AT THIS SITE AND AND BE RESPONSIBLE FOR ACCURACY AND CORRECTNESS OF SAME.
- CONTRACTOR SHALL COORDINATE WORK WITH ALL OTHER TRADES AND NOTIFY OWNER & LANDESIGN OF ANY DISCREPANCIES PRIOR TO CONSTRUCTION.
- THE CONTRACTOR SHALL EMPLOY, AS REQUIRED BY GOVERNING AUTHORITIES, AN APPROVED TESTING LABORATORY TO MAKE ALL TESTS FROM CONCRETE, SOIL COMPACTON AND WELDING TO INSURE COMPLIANCE WITH PLANS, STANDARDS AND CODES. COST SHALL BE INCLUDED AS INCIDENTAL TO THE CONTRACT.
- ALL EXISTING WORK OR LANDSCAPING NOT SHOWN TO BE ALTERED OR REMOVED SHALL BE PROTECTED FROM DAMAGE DURING CONSTRUCTION. THE CONTRACTOR(S) SHALL BEAR THE TOTAL EXPENSE FOR, AND SHALL REPAIR ANY DAMAGE TO EXISTING CONDITIONS, OR IMPROVEMENTS NOT INDICATED IN THE DRAWINGS OR SPECIFICATIONS TO RECEIVE ALTERATION, ADDITIONS OR REMOVAL.

LAYOUT NOTES:

- ALL MATERIALS AND CONSTRUCTION WITHIN RIGHT OF WAYS SHALL BE IN ACCORDANCE WITH THE CITY OF WEST FALLS CHURCH STANDARD SPECIFICATIONS AND CONSTRUCTION STANDARDS, AND STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION PREPARED BY THE CITY OF WEST FALLS CHURCH COMMERCIAL STREETSCAPE STANDARDS.
- EXISTING UTILITIES ARE SHOWN SCHEMATICALLY AND ARE FOR THE CONTRACTOR'S GUIDANCE ONLY. THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS ARE BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES, AND, WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANY AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF UTILITIES.
- CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING ALL EXISTING IMPROVEMENTS IN THE CONSTRUCTION OF THIS PROJECT. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRS OF DAMAGE TO ANY EXISTING IMPROVEMENTS DURING CONSTRUCTION. REPAIRS SHALL BE EQUAL TO OR BETTER THAN CONDITION PRIOR TO CONSTRUCTION.
- ALL ONSITE PAVING DIMENSIONS ARE TO THE FACE OF CURB, WHERE APPLICABLE, UNLESS NOTED OTHERWISE.
- ALL CURB RADI AND SIDEWALK RETURNS ARE 2' UNLESS NOTED OTHERWISE.
- ALL PAVING AND EARTHWORK OPERATIONS SHALL CONFORM TO THE PROJECT GEOTECHNICAL REPORT.
- BOUNDARY SURVEY: BOUNDARY SURVEY INFORMATION IS BASED ON THE BOUNDARY SURVEY PREPARED BY WALTER L PHILLIPS INC. REFER TO THE BOUNDARY SURVEY AND PLAT TO VERIFY PROPERTY LINES AND EASEMENT LOCATIONS.
- BUILDING DIMENSIONS: THE CONTRACTOR SHALL REFER TO THE ARCHITECTURAL PLANS TO VERIFY THE EXACT BUILDING DIMENSIONS.
- LAY PAVERS IN PATTERN(S) SHOWN ON DRAWINGS. PLACE UNITS HAND TIGHT WITHOUT USING HAMMERS. MAKE HORIZONTAL ADJUSTMENTS TO PLACEMENT OF LAID PAVERS WITH RUBBER HAMMERS AS REQUIRED.
- PROVIDE JOINTS BETWEEN PAVERS BETWEEN 1/16 IN. AND 3/16 IN. (2 AND 5 MM) WIDE. NO MORE THAN 5% OF THE JOINTS SHALL EXCEED 1/4" WIDE TO ACHIEVE STRAIGHT BOND LINES.
- JOINT (BOND) LINES SHALL NOT DEVIATE MORE THAN ±1/2 IN. (±15 MM) OVER 50 FT. (15 M) FROM STRING LINES.
- FILL GAPS AT THE EDGES OF THE PAVED AREA WITH CUT PAVERS OR EDGE UNITS.
- CUT PAVERS TO BE PLACED ALONG THE EDGE WITH A MASONRY SAW.
- ADJUST BOND PATTERN AT PAVEMENT EDGES SUCH THAT CUTTING OF EDGE PAVERS IS MINIMIZED.
- IN NO CASE SHALL A CUT PAVER BE LESS THAN 1/3 FULL PAVER SIZE.
- PAVER DIMENSIONS ARE NOMINAL. PRIOR TO POURING SLABS, BANDING, OR OTHERWISE SETTING PAVER FIELDS, VERIFY ACTUAL PAVER SIZES AND LAYOUT OF THE PAVER FIELDS. MAKE MINOR ADJUSTMENTS TO EDGE CONSTRAINTS AS REQUIRED TO ACCOMMODATE ACTUAL PAVER SIZES. NOTIFY LANDESIGN IMMEDIATELY OF DISCREPANCIES AND/OR ADJUSTMENTS.

GRADING NOTES:

- STAKE PER SPOT ELEVATIONS AND NOTED SLOPES. CONTOURS ARE PROVIDED FOR MASS GRADING/INTENT ONLY.
- WRITTEN DIMENSIONS AND GRADES PREVAL OVER SCALED DIMENSIONS. NOTIFY LANDESIGN OF ANY DISCREPANCIES.
- ALL SPOT ELEVATIONS SHOWN ON GRADING PLAN ARE TO BOTTOM OF CURB/TOP OF PAVEMENT UNLESS OTHERWISE NOTED. ALL RIM ELEVATIONS ARE TO EDGE OF PAVEMENT.
- REFER TO GEOTECHNICAL ENGINEER AND GEOTECH REPORT FOR INFORMATION ON SUBSURFACE MATERIALS, TOPSOIL, STRUCTURAL MATERIAL, DEEP FILLS, EXCAVATION, AND FOUNDATIONS.
- APPROVAL OF THIS PLAN IS NOT AN AUTHORIZATION TO GRADE ADJACENT PROPERTIES. WHEN FIELD CONDITIONS WARRANT OFF-SITE GRADING, PERMISSION MUST BE OBTAINED FROM THE AFFECTED PROPERTY OWNERS.
- IN ORDER TO ASSURE PROPER DRAINAGE, KEEP A MINIMUM OF .5% SLOPE ON THE CURB.
- ALL PLANTING ISLANDS SHALL BE GRADED TO MOUND TO PROVIDE POSITIVE DRAINAGE.
- CONTRACTOR TO VERIFY 2% MAX. CROSS-SLOPE ON ALL SIDEWALKS.
- CONTRACTOR TO VERIFY THAT ALL SIDEWALK SLOPES, HANDICAP RAMPS, AND HANDICAP PARKING SPACES MEET ADA REQUIREMENTS.
- CONCRETE SIDEWALKS ADJACENT TO TREE SAVE LOCATIONS SHOULD BE POURED ON TOP OF EXISTING GRADE.
- REFER TO LANDSCAPE PLAN FOR ALL TREE PROTECTION FENCE LOCATIONS AND INSTALLATION PROCEDURES. BEFORE GRADING/CONSTRUCTION BEGINS, CALL FOR INSPECTION OF TREE PROTECTION BARRICADES, NO SOIL DISTURBANCE OR COMPACTION, CONSTRUCTION MATERIALS, TRAFFIC, BURIAL PITS, TRENCHING, OR OTHER LAND DISTURBING ACTIVITY ALLOWED IN THE TREE PROTECTION ZONE.
- DIMENSIONS ON BUILDINGS ARE FOR GRADING PURPOSES ONLY AND ARE NOT TO BE USED TO LAYOUT FOOTINGS.
- GRADING CONTRACTORS SHALL NOTIFY AND COOPERATE WITH ALL UTILITY COMPANIES OR FIRMS HAVING FACILITIES ON OR ADJACENT TO THE SITE BEFORE DISTURBING, ALTERING, REMOVING, RELOCATING, ADJUSTING OR CONNECTING TO SAID FACILITIES. CONTRACTORS SHALL PAY ALL COSTS IN CONNECTION WITH THE ALTERATION OF OR RELOCATION OF THE FACILITIES. CONTRACTORS SHALL RAISE OR LOWER TOPS OF EXISTING MANHOLES AS REQUIRED TO MATCH FINISHED GRADES.
- GRADING CONTRACTOR SHALL COOPERATE AND WORK WITH ALL OTHER CONTRACTORS PERFORMING WORK ON THIS PROJECT TO INSURE PROPER AND TIMELY COMPLETION OF THIS PROJECT.

KEY MAP

REAL



PROJECT

WEST FALLS CHURCH

EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:

SCALE: NORTH

VERT: N/A
HORZ:

SHEET TITLE


GENERAL NOTES

SHEET NUMBER

L001

MATERIALS PLAN LEGEND

SYMBOL	FURNISHINGS DESCRIPTION	DETAIL
F-101	BENCH 1	3/L531
F-102	TRASH / RECYCLING RECEPTACLE 1	1/L531
F-104	BIKE RACK 1	4/L531
F-105	BOLLARD 1	
F-106	SCULPTURE SWING 1	
SYMBOL	LIGHTING & ELECTRICAL DESCRIPTION	DETAIL
L-101	POLE LIGHT 1	6/L531
L-102	POLE LIGHT 2	
L-103	POLE LIGHT 3	
SYMBOL	MISCELLANEOUS DESCRIPTION	DETAIL
M-101	DECKING 1	
M-102	FIRE PIT 1	
SYMBOL	PAVING & CURBS DESCRIPTION	DETAIL
P-101	PED. BRICK PAVING 1	5/L511
P-102	PED. CONCRETE PAVING 1	1/L511
P-103	PED. PAVERS 1	6/L511
P-104	VEH. PAVERS 1	2/L511
P-105	PED. PERM. PAVERS 1	9/L511
P-106	PED. SYNTHETIC TURF 1	1/L512
P-107	PED. DECORATIVE GRAVEL 1	2/L512
P-108	PED. WOOD DECKING 1	
SYMBOL	RAILINGS & FENCES DESCRIPTION	DETAIL
R-102	HANDRAIL 1	5/L521
R-104	HANDRAIL 2	
SYMBOL	WALLS & STAIRS DESCRIPTION	DETAIL
W-103	STAIR 1	2/L521
W-102	STAIR 2	3/L521
W-104	WALL 2	4/L521
W-106	WALL 4	4/L521
W-107	WALL 5	4/L521
W-108	STAGE	
(P.B.)	PLANT BED	

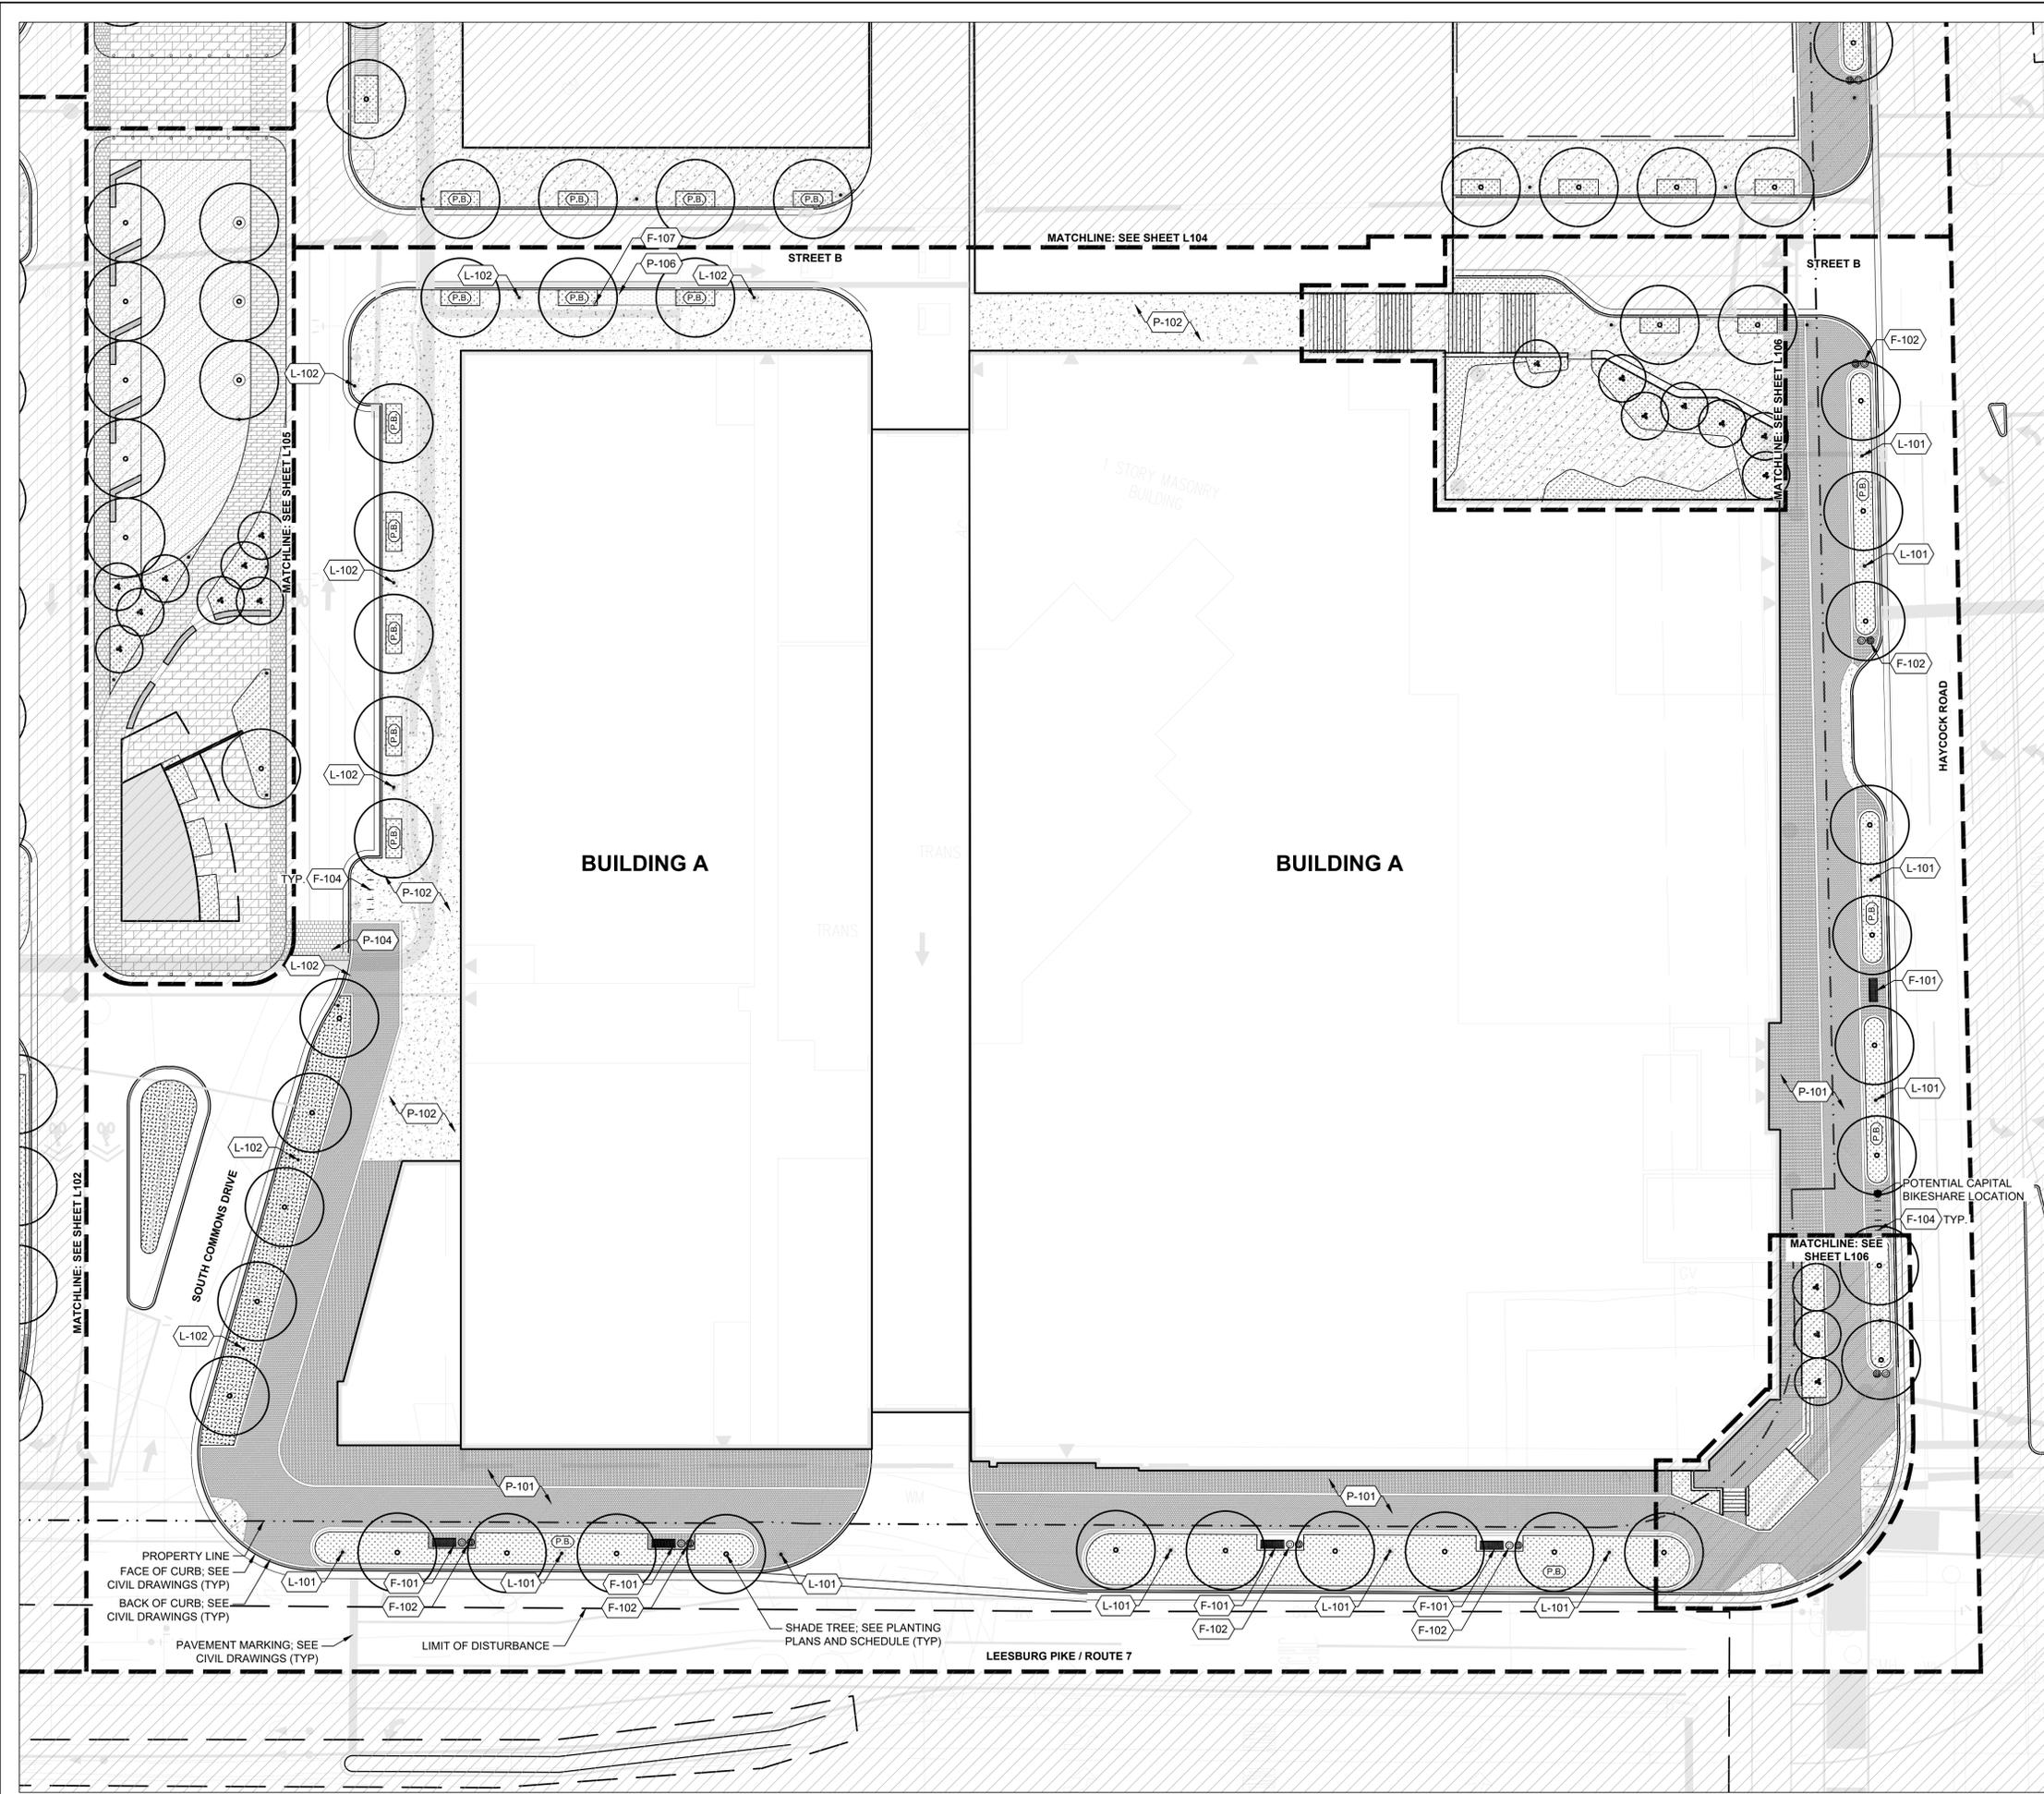

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH


EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:



SHEET TITLE


MATERIALS PLAN - BLOCK A

SHEET NUMBER

L101

MATERIALS PLAN LEGEND

SYMBOL	FURNISHINGS DESCRIPTION	DETAIL
F-101	BENCH 1	3/L531
F-102	TRASH / RECYCLING RECEPTACLE 1	1/L531
F-104	BIKE RACK 1	4/L531
F-105	BOLLARD 1	
F-106	SCULPTURE SWING 1	
SYMBOL	LIGHTING & ELECTRICAL DESCRIPTION	DETAIL
L-101	POLE LIGHT 1	6/L531
L-102	POLE LIGHT 2	
L-103	POLE LIGHT 3	
SYMBOL	MISCELLANEOUS DESCRIPTION	DETAIL
M-101	DECKING 1	
M-102	FIRE PIT 1	
SYMBOL	PAVING & CURBS DESCRIPTION	DETAIL
P-101	PED. BRICK PAVING 1	5/L511
P-102	PED. CONCRETE PAVING 1	1/L511
P-103	PED. PAVERS 1	6/L511
P-104	VEH. PAVERS 1	2/L511
P-105	PED. PERM. PAVERS 1	9/L511
P-106	PED. SYNTHETIC TURF 1	1/L512
P-107	PED. DECORATIVE GRAVEL 1	2/L512
P-108	PED. WOOD DECKING 1	
SYMBOL	RAILINGS & FENCES DESCRIPTION	DETAIL
R-102	HANDRAIL 1	5/L521
R-104	HANDRAIL 2	
SYMBOL	WALLS & STAIRS DESCRIPTION	DETAIL
W-103	STAIR 1	2/L521
W-102	STAIR 2	3/L521
W-104	WALL 2	4/L521
W-106	WALL 4	4/L521
W-107	WALL 5	4/L521
W-108	STAGE	
(P.B.)	PLANT BED	

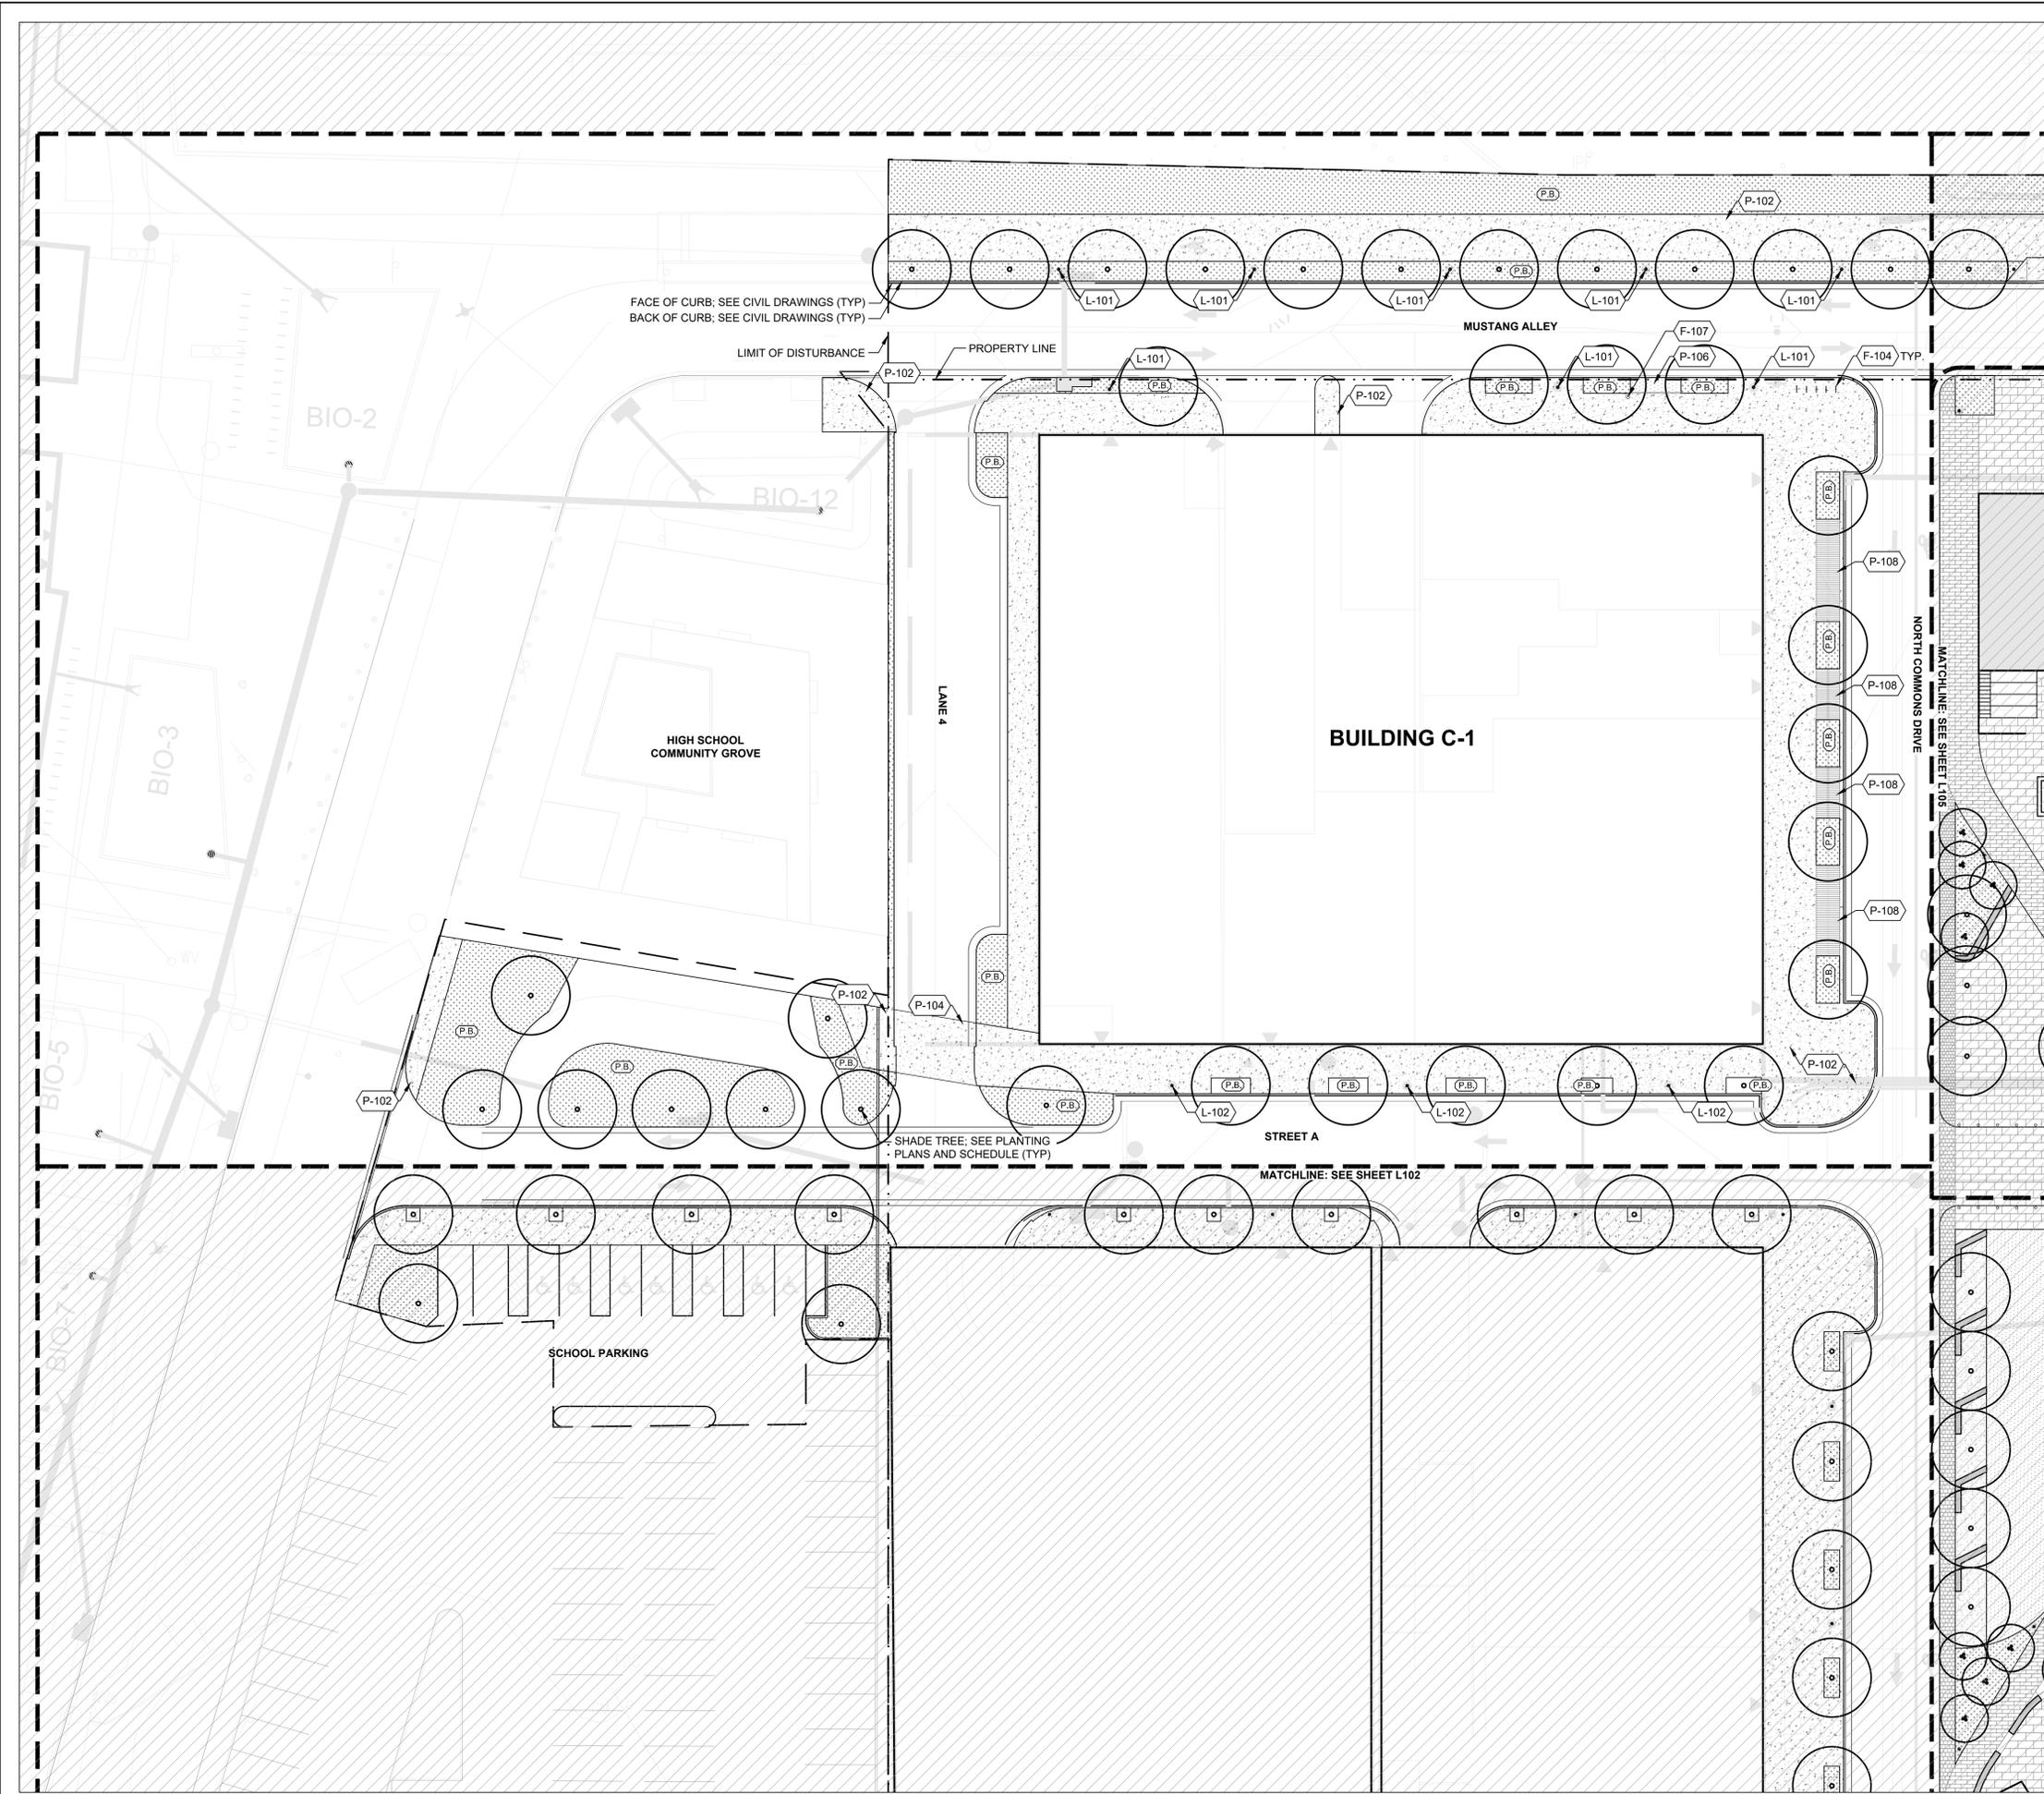

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH


EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:



SHEET TITLE


MATERIALS PLAN - BLOCK C

SHEET NUMBER

L103

MATERIALS PLAN LEGEND

SYMBOL	FURNISHINGS DESCRIPTION	DETAIL
F-101	BENCH 1	3/L531
F-102	TRASH / RECYCLING RECEPTACLE 1	1/L531
F-104	BIKE RACK 1	4/L531
F-105	BOLLARD 1	
F-106	SCULPTURE SWING 1	
SYMBOL	LIGHTING & ELECTRICAL DESCRIPTION	DETAIL
L-101	POLE LIGHT 1	6/L531
L-102	POLE LIGHT 2	
L-103	POLE LIGHT 3	
SYMBOL	MISCELLANEOUS DESCRIPTION	DETAIL
M-101	DECKING 1	
M-102	FIRE PIT 1	
SYMBOL	PAVING & CURBS DESCRIPTION	DETAIL
P-101	PED. BRICK PAVING 1	5/L511
P-102	PED. CONCRETE PAVING 1	1/L511
P-103	PED. PAVERS 1	6/L511
P-104	VEH. PAVERS 1	2/L511
P-105	PED. PERM. PAVERS 1	9/L511
P-106	PED. SYNTHETIC TURF 1	1/L512
P-107	PED. DECORATIVE GRAVEL 1	2/L512
P-108	PED. WOOD DECKING 1	
SYMBOL	RAILINGS & FENCES DESCRIPTION	DETAIL
R-102	HANDRAIL 1	5/L521
R-104	HANDRAIL 2	
SYMBOL	WALLS & STAIRS DESCRIPTION	DETAIL
W-102	STAIR 1	2/L521
W-103	STAIR 2	3/L521
W-104	WALL 2	4/L521
W-106	WALL 4	4/L521
W-107	WALL 5	4/L521
W-108	STAGE	
(P.B.)	PLANT BED	

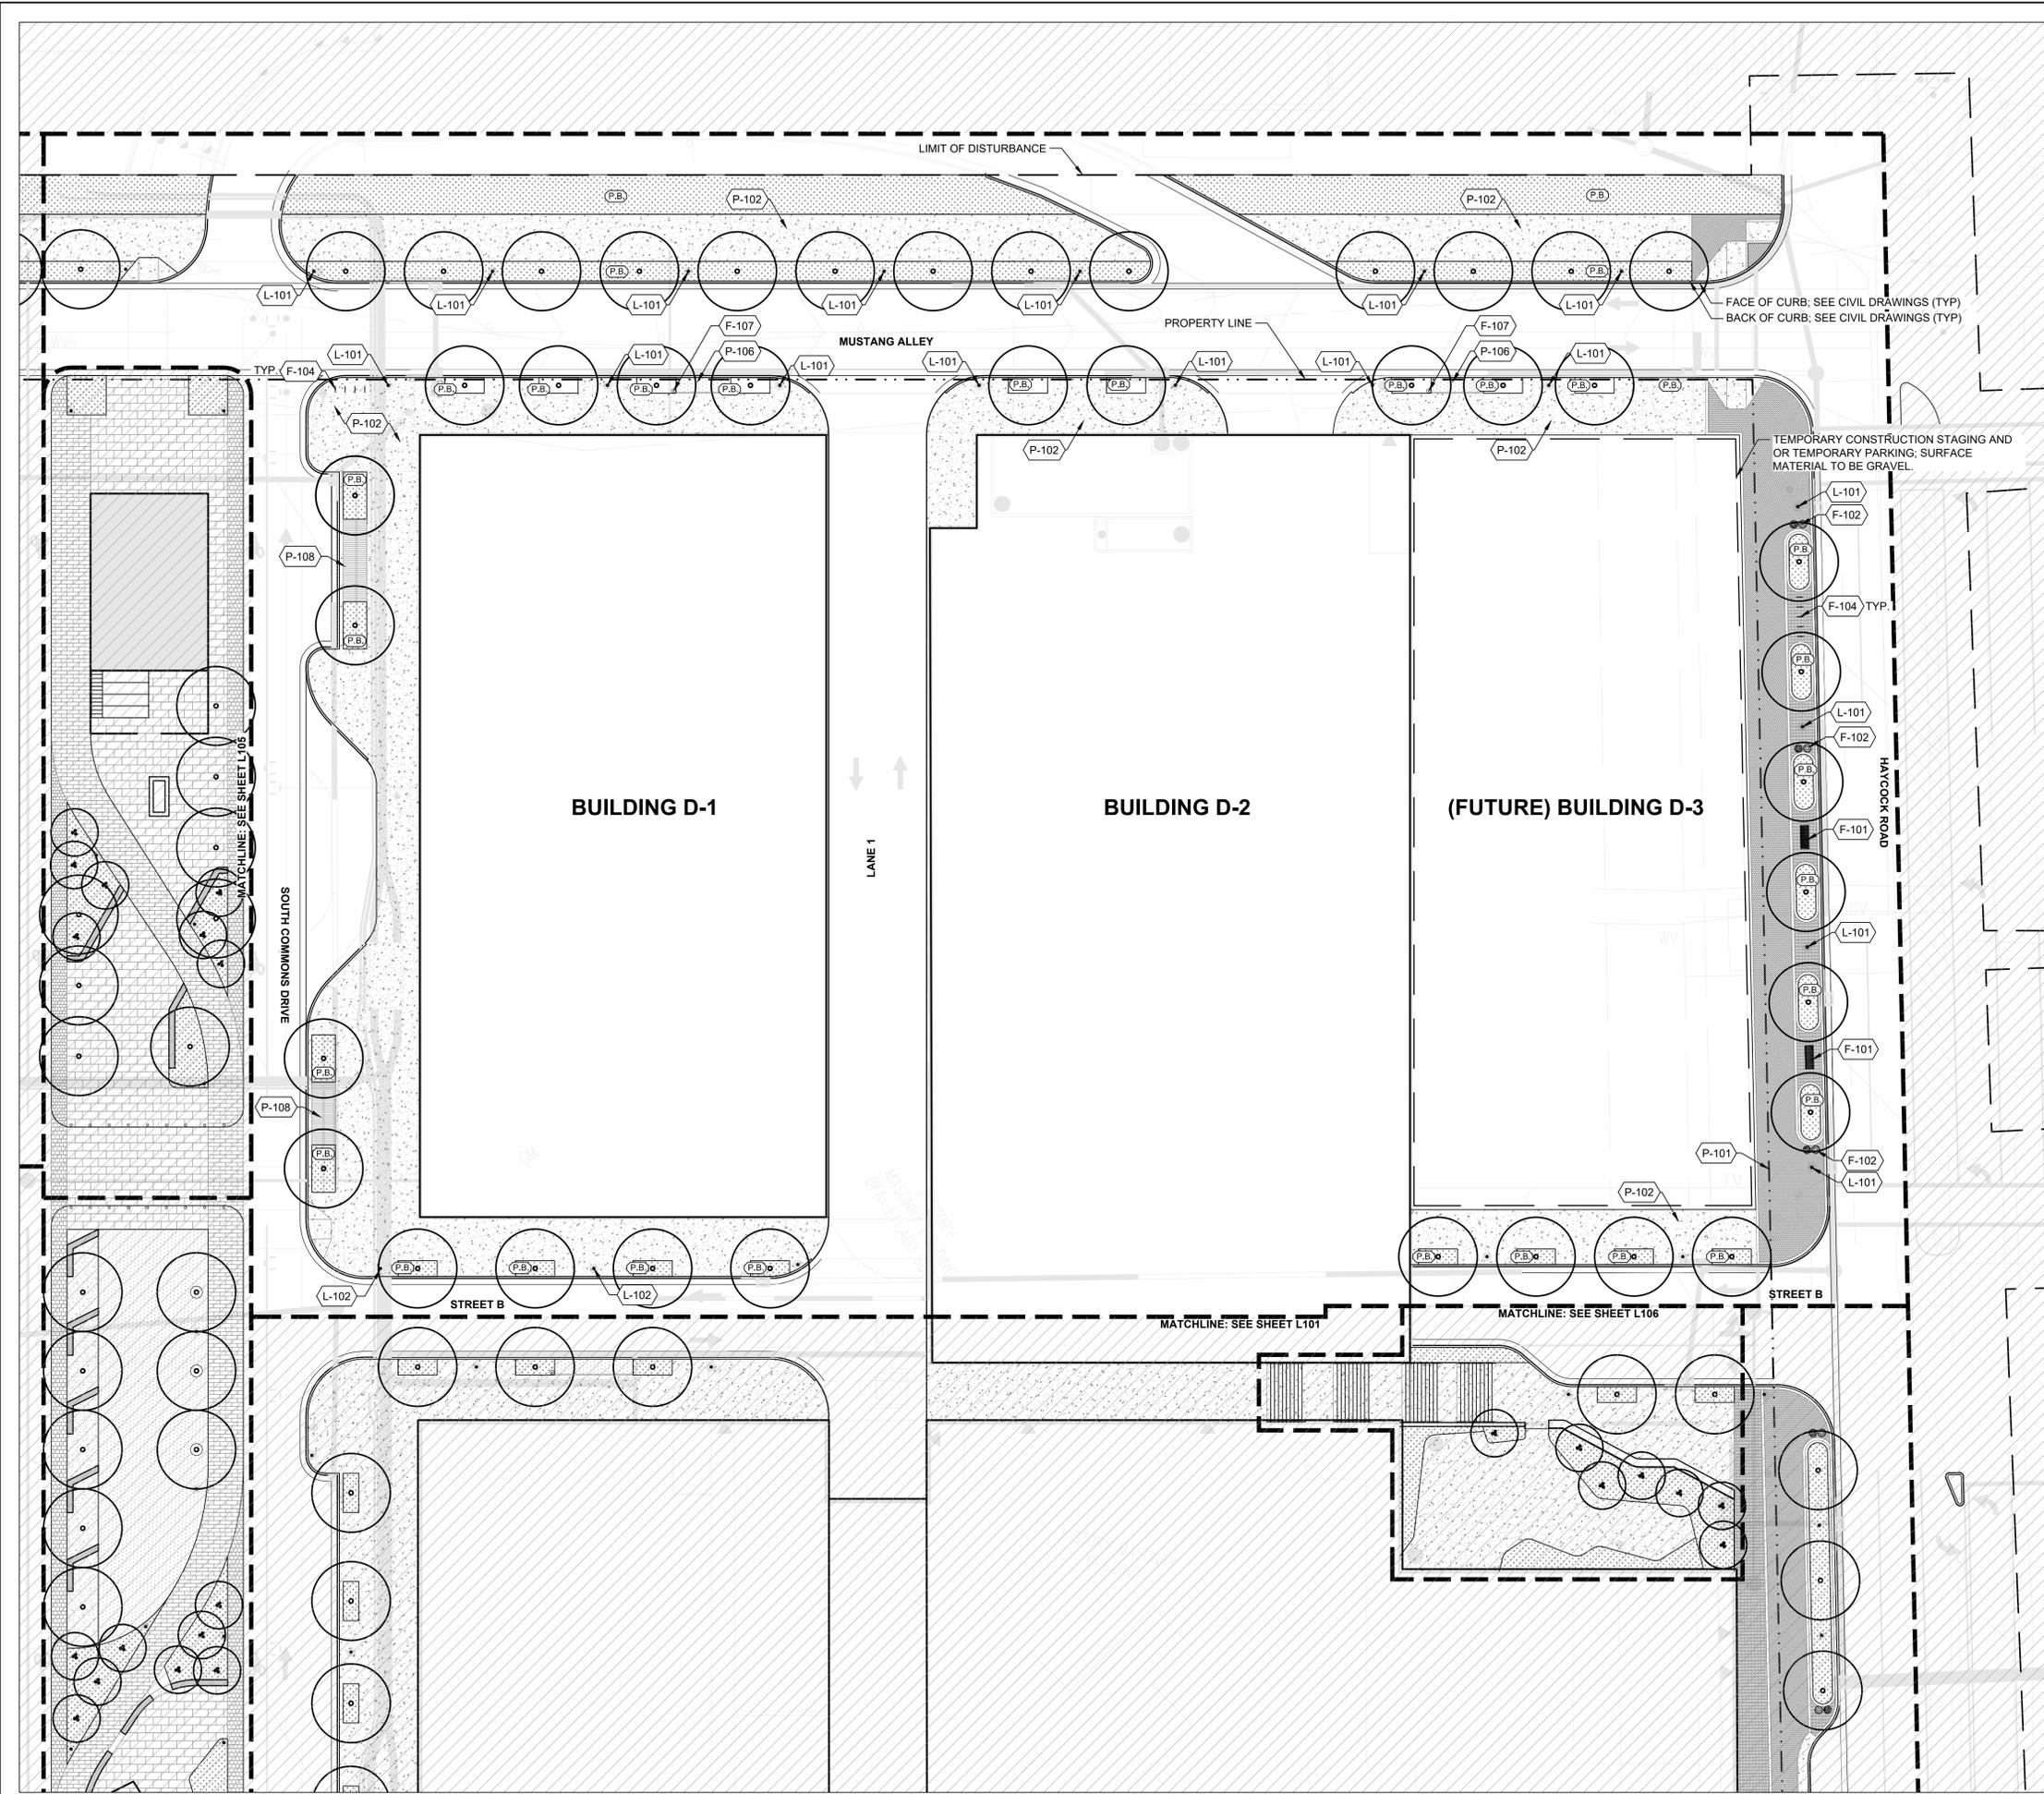

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH


EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:



SHEET TITLE



MATERIALS PLAN - BLOCK D

SHEET NUMBER

L104

MATERIALS PLAN LEGEND

SYMBOL	FURNISHINGS DESCRIPTION	DETAIL
F-101	BENCH 1	3/L531
F-102	TRASH / RECYCLING RECEPTACLE 1	1/L531
F-104	BIKE RACK 1	4/L531
F-105	BOLLARD 1	
F-106	SCULPTURE SWING 1	
SYMBOL	LIGHTING & ELECTRICAL DESCRIPTION	DETAIL
L-101	POLE LIGHT 1	6/L531
L-102	POLE LIGHT 2	
L-103	POLE LIGHT 3	
SYMBOL	MISCELLANEOUS DESCRIPTION	DETAIL
M-101	DECKING 1	
M-102	FIRE PIT 1	
SYMBOL	PAVING & CURBS DESCRIPTION	DETAIL
P-101	PED. BRICK PAVING 1	5/L511
P-102	PED. CONCRETE PAVING 1	1/L511
P-103	PED. PAVERS 1	6/L511
P-104	VEH. PAVERS 1	2/L511
P-105	PED. PERM. PAVERS 1	9/L511
P-106	PED. SYNTHETIC TURF 1	1/L512
P-107	PED. DECORATIVE GRAVEL 1	2/L512
P-108	PED. WOOD DECKING 1	
SYMBOL	RAILINGS & FENCES DESCRIPTION	DETAIL
R-102	HANDRAIL 1	5/L521
R-104	HANDRAIL 2	
SYMBOL	WALLS & STAIRS DESCRIPTION	DETAIL
W-102	STAIR 1	2/L521
W-103	STAIR 2	3/L521
W-104	WALL 2	4/L521
W-106	WALL 4	4/L521
W-107	WALL 5	4/L521
W-108	STAGE	
(P.B.)	PLANT BED	

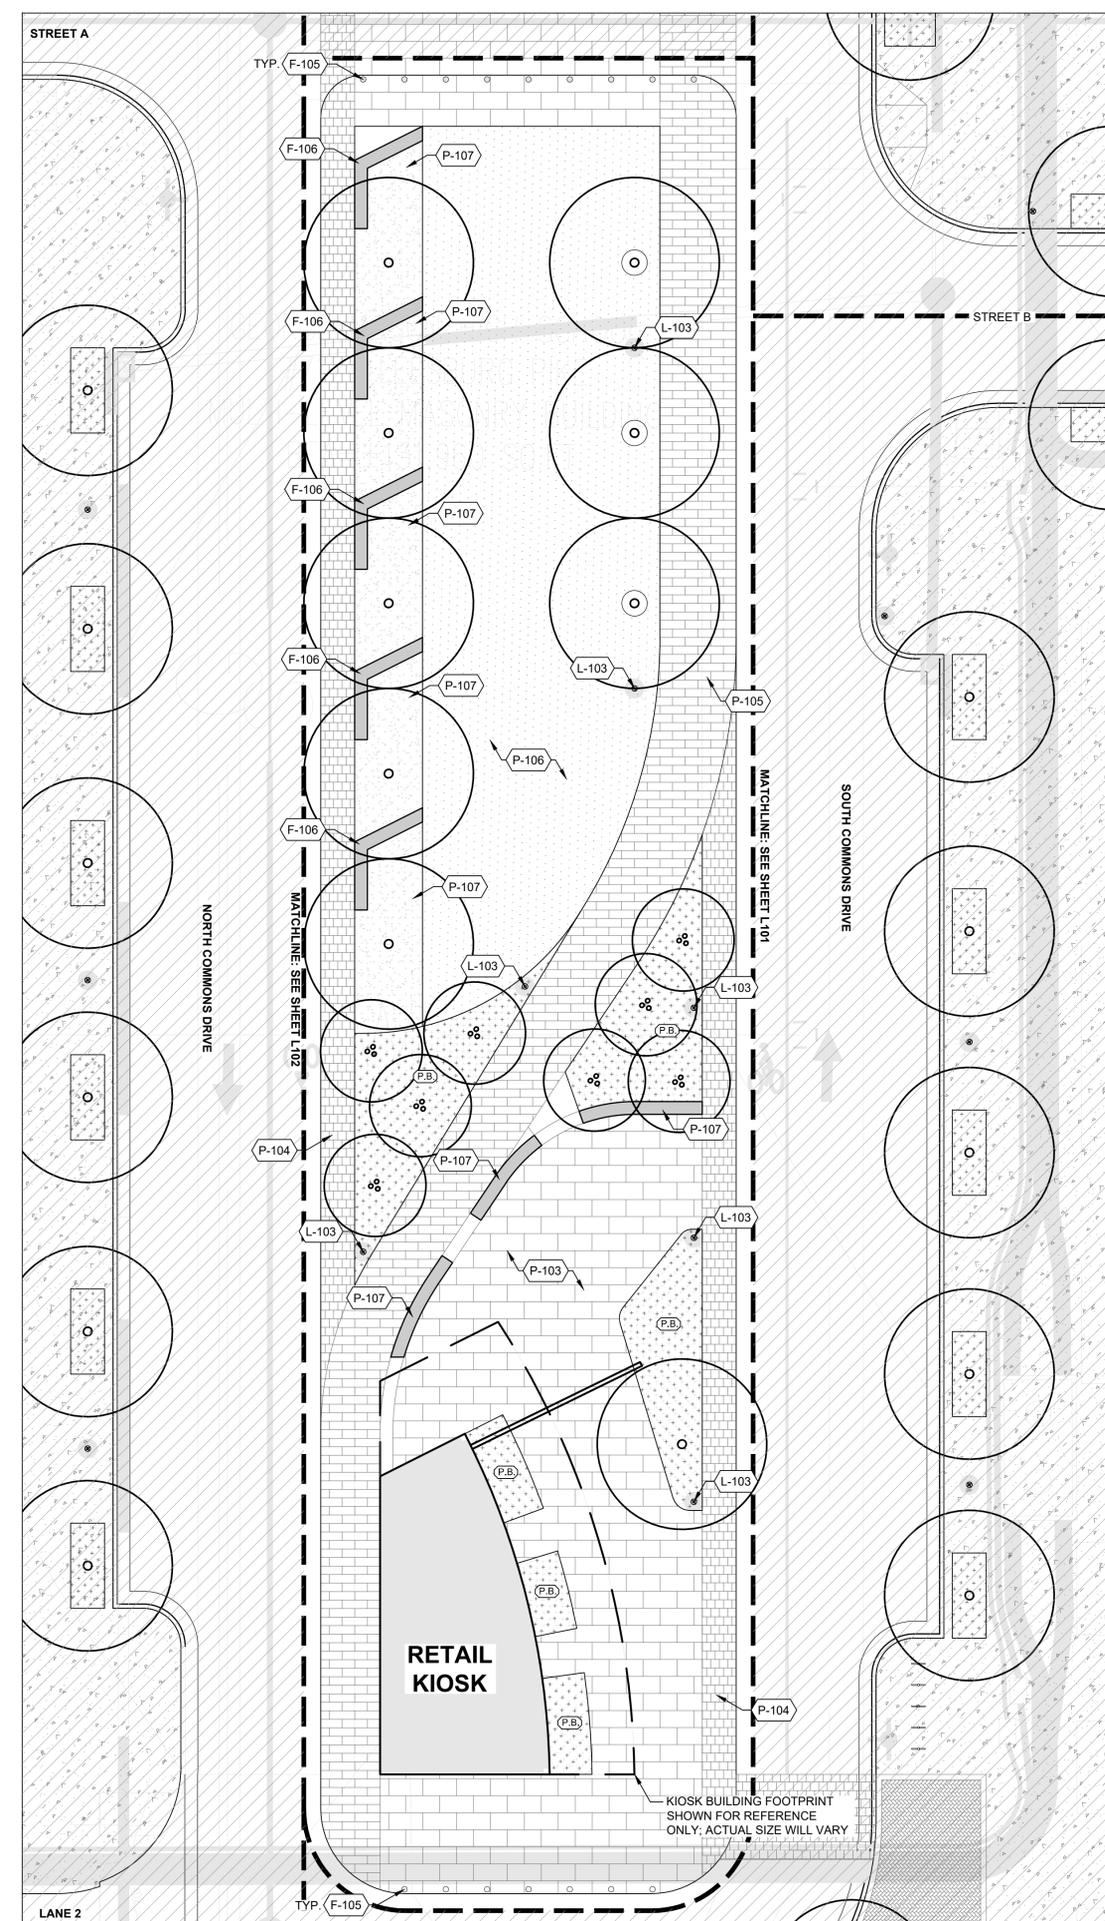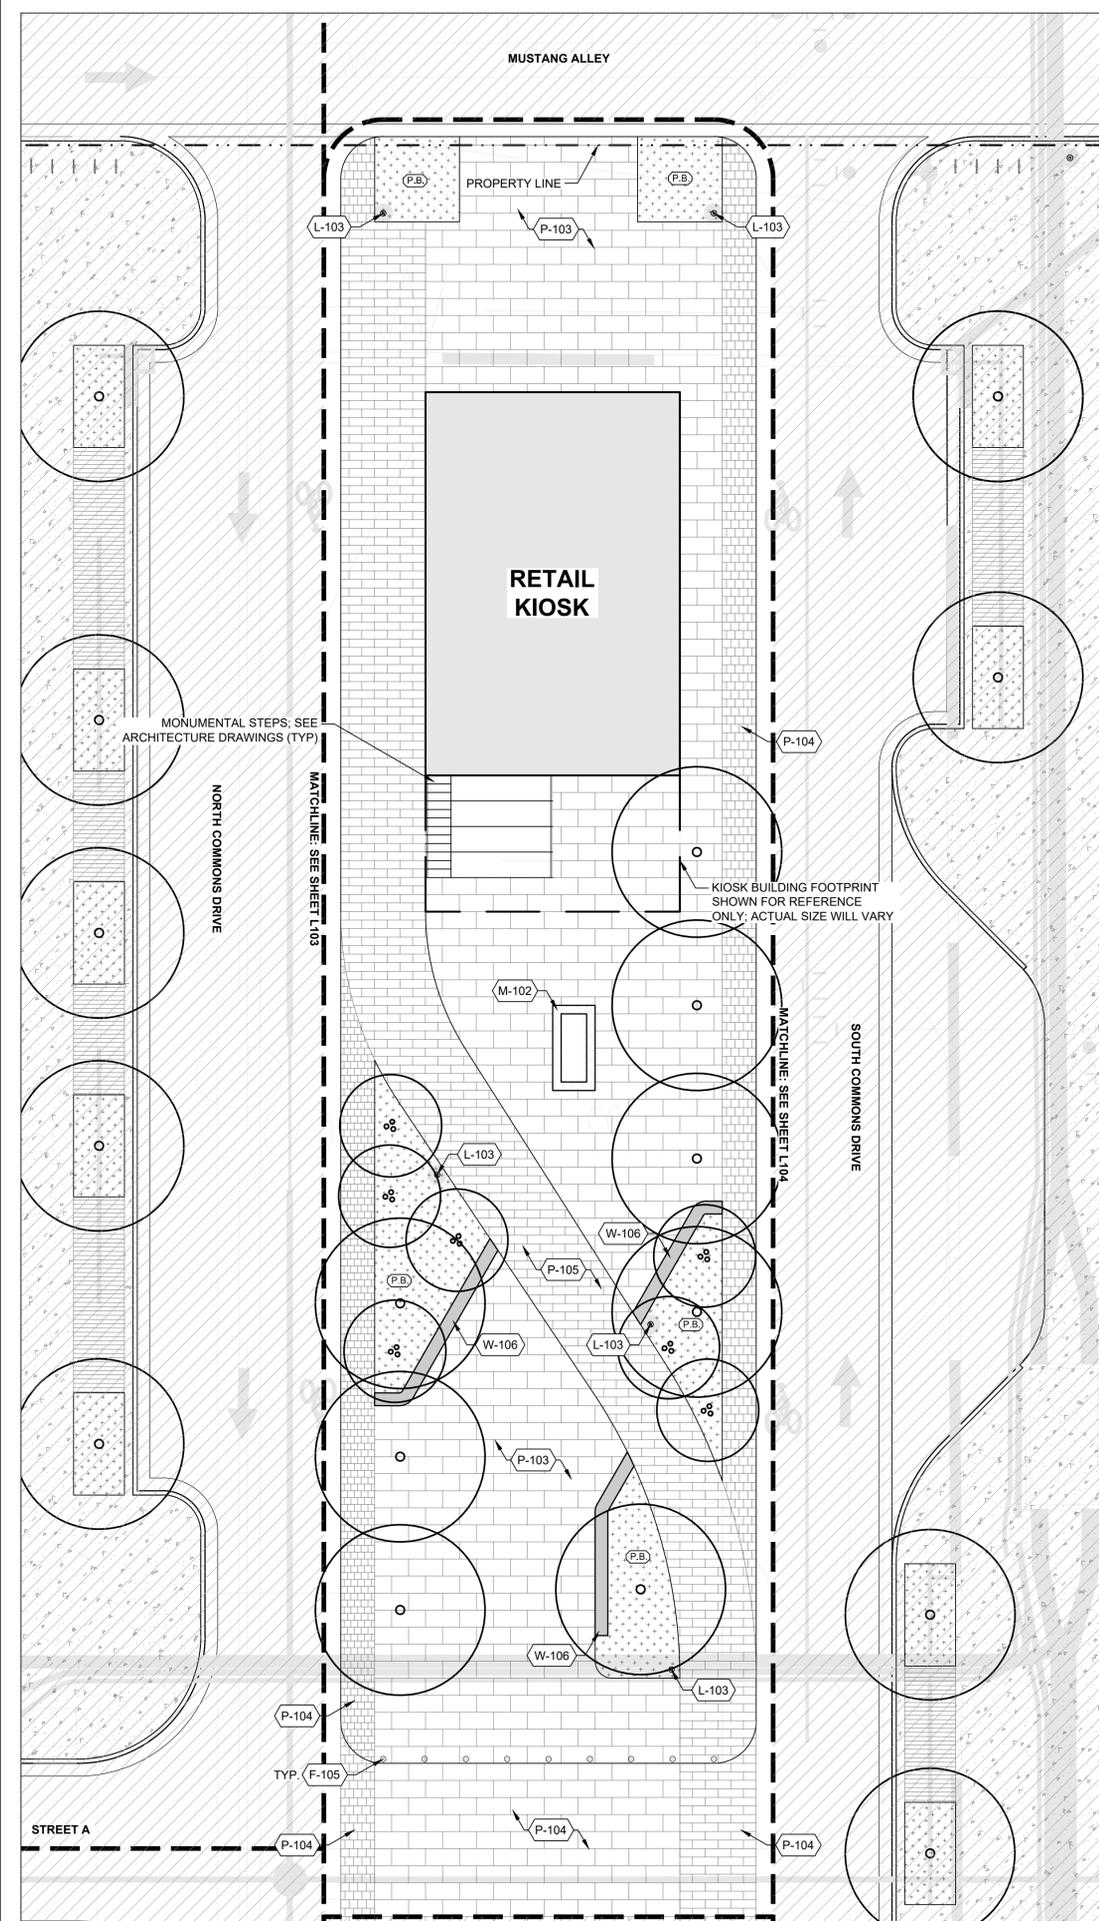

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH


EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:






MATERIALS PLAN - COMMONS

SHEET NUMBER
L105

MATERIALS PLAN LEGEND

SYMBOL	FURNISHINGS DESCRIPTION	DETAIL
F-101	BENCH 1	3/L531
F-102	TRASH / RECYCLING RECEPTACLE 1	1/L531
F-104	BIKE RACK 1	4/L531
F-105	BOLLARD 1	
F-106	SCULPTURE SWING 1	
SYMBOL	LIGHTING & ELECTRICAL DESCRIPTION	DETAIL
L-101	POLE LIGHT 1	6/L531
L-102	POLE LIGHT 2	
L-103	POLE LIGHT 3	
SYMBOL	MISCELLANEOUS DESCRIPTION	DETAIL
M-101	DECKING 1	
M-102	FIRE PIT 1	
SYMBOL	PAVING & CURBS DESCRIPTION	DETAIL
P-101	PED. BRICK PAVING 1	5/L511
P-102	PED. CONCRETE PAVING 1	1/L511
P-103	PED. PAVERS 1	6/L511
P-104	VEH. PAVERS 1	2/L511
P-105	PED. PERM. PAVERS 1	9/L511
P-106	PED. SYNTHETIC TURF 1	1/L512
P-107	PED. DECORATIVE GRAVEL 1	2/L512
P-108	PED. WOOD DECKING 1	
SYMBOL	RAILINGS & FENCES DESCRIPTION	DETAIL
R-102	HANDRAIL 1	5/L521
R-104	HANDRAIL 2	
SYMBOL	WALLS & STAIRS DESCRIPTION	DETAIL
W-102	STAIR 1	2/L521
W-103	STAIR 2	3/L521
W-104	WALL 2	4/L521
W-106	WALL 4	4/L521
W-107	WALL 5	4/L521
W-108	STAGE	
(P.B.)	PLANT BED	

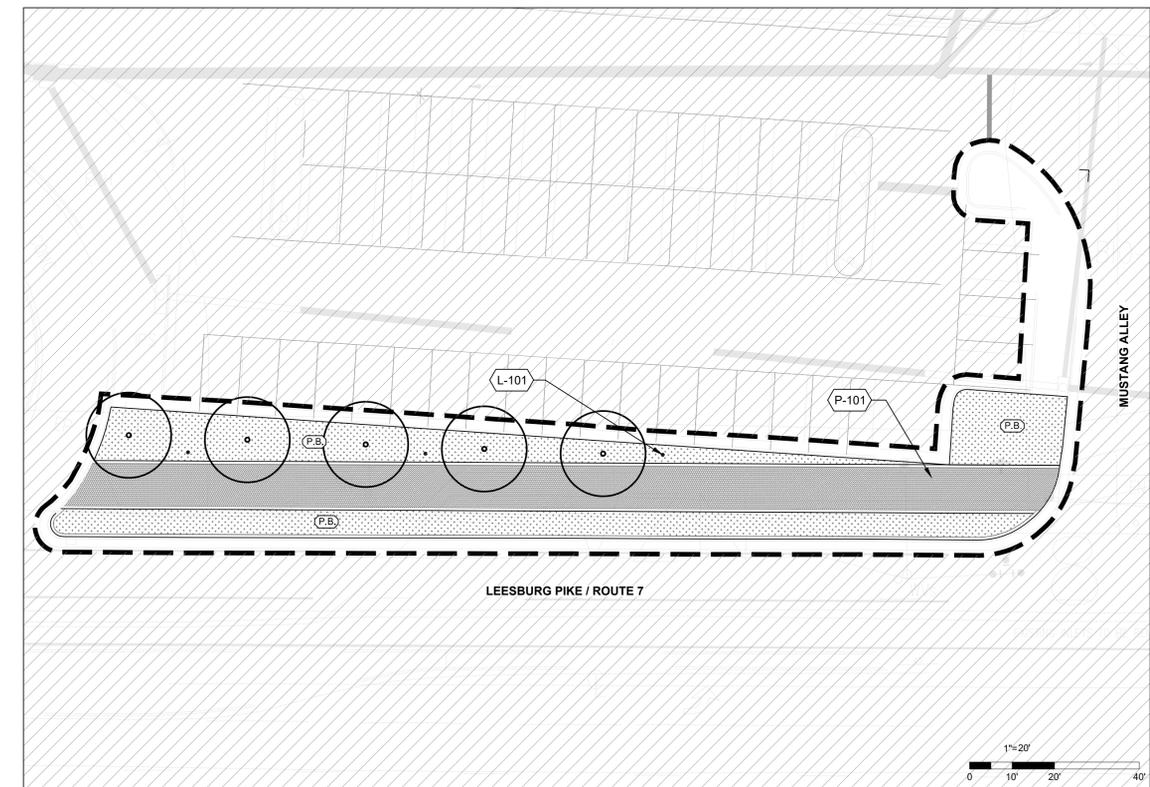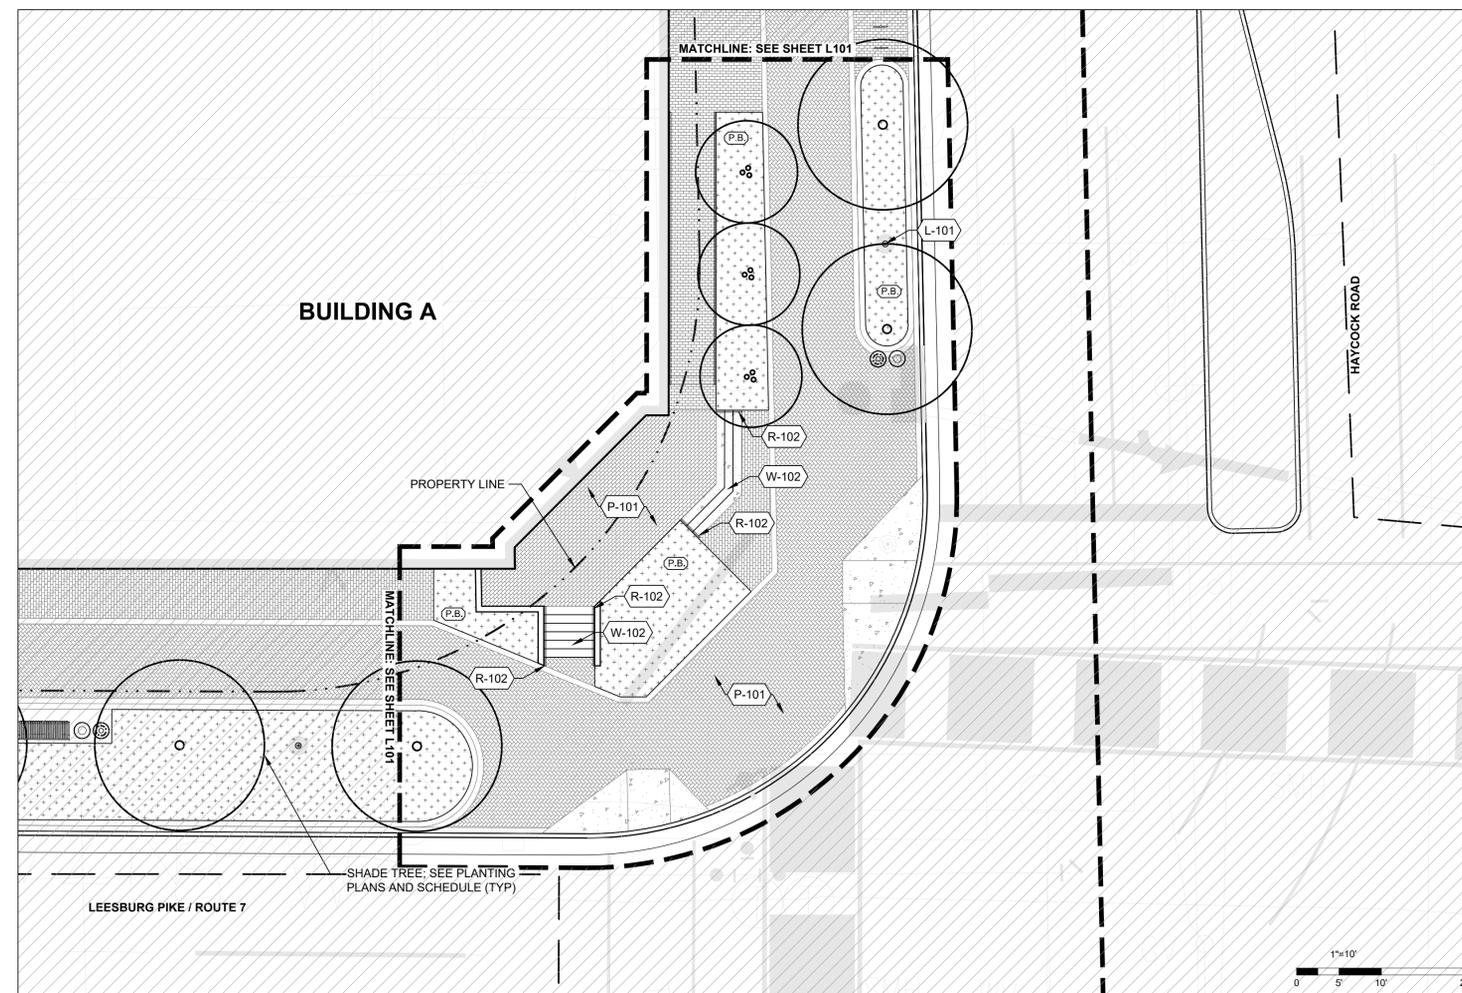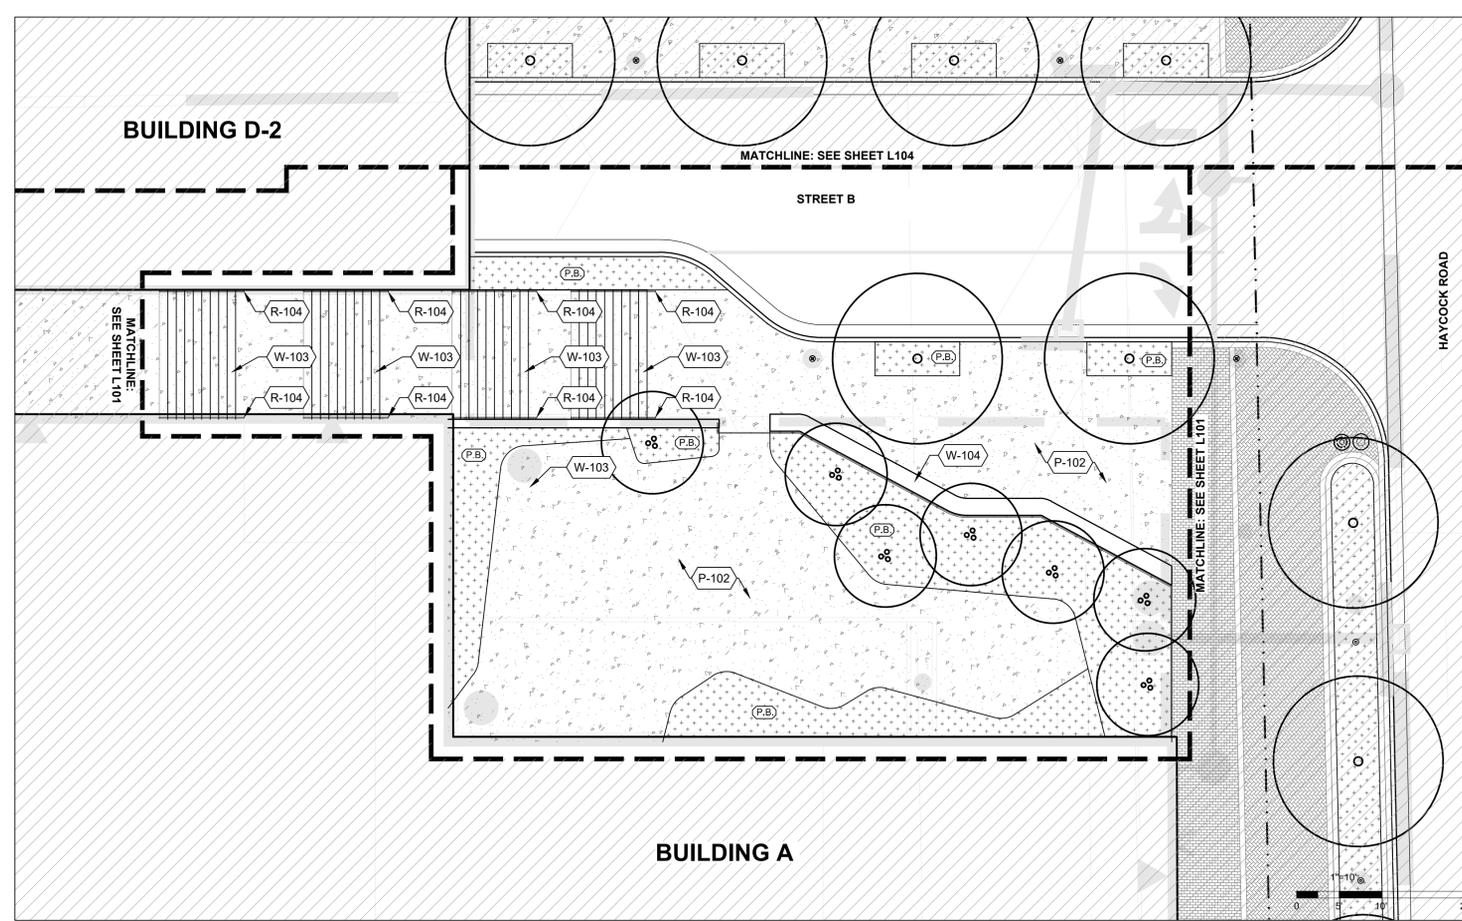

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH

EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020


DESIGNED BY:
DRAWN BY:
CHECKED BY:

SCALE: NORTH
VERT: N/A
HORZ: AS NOTED

SHEET TITLE
MATERIALS PLAN - BLOCK A
ENLARGEMENTS

SHEET NUMBER

L106

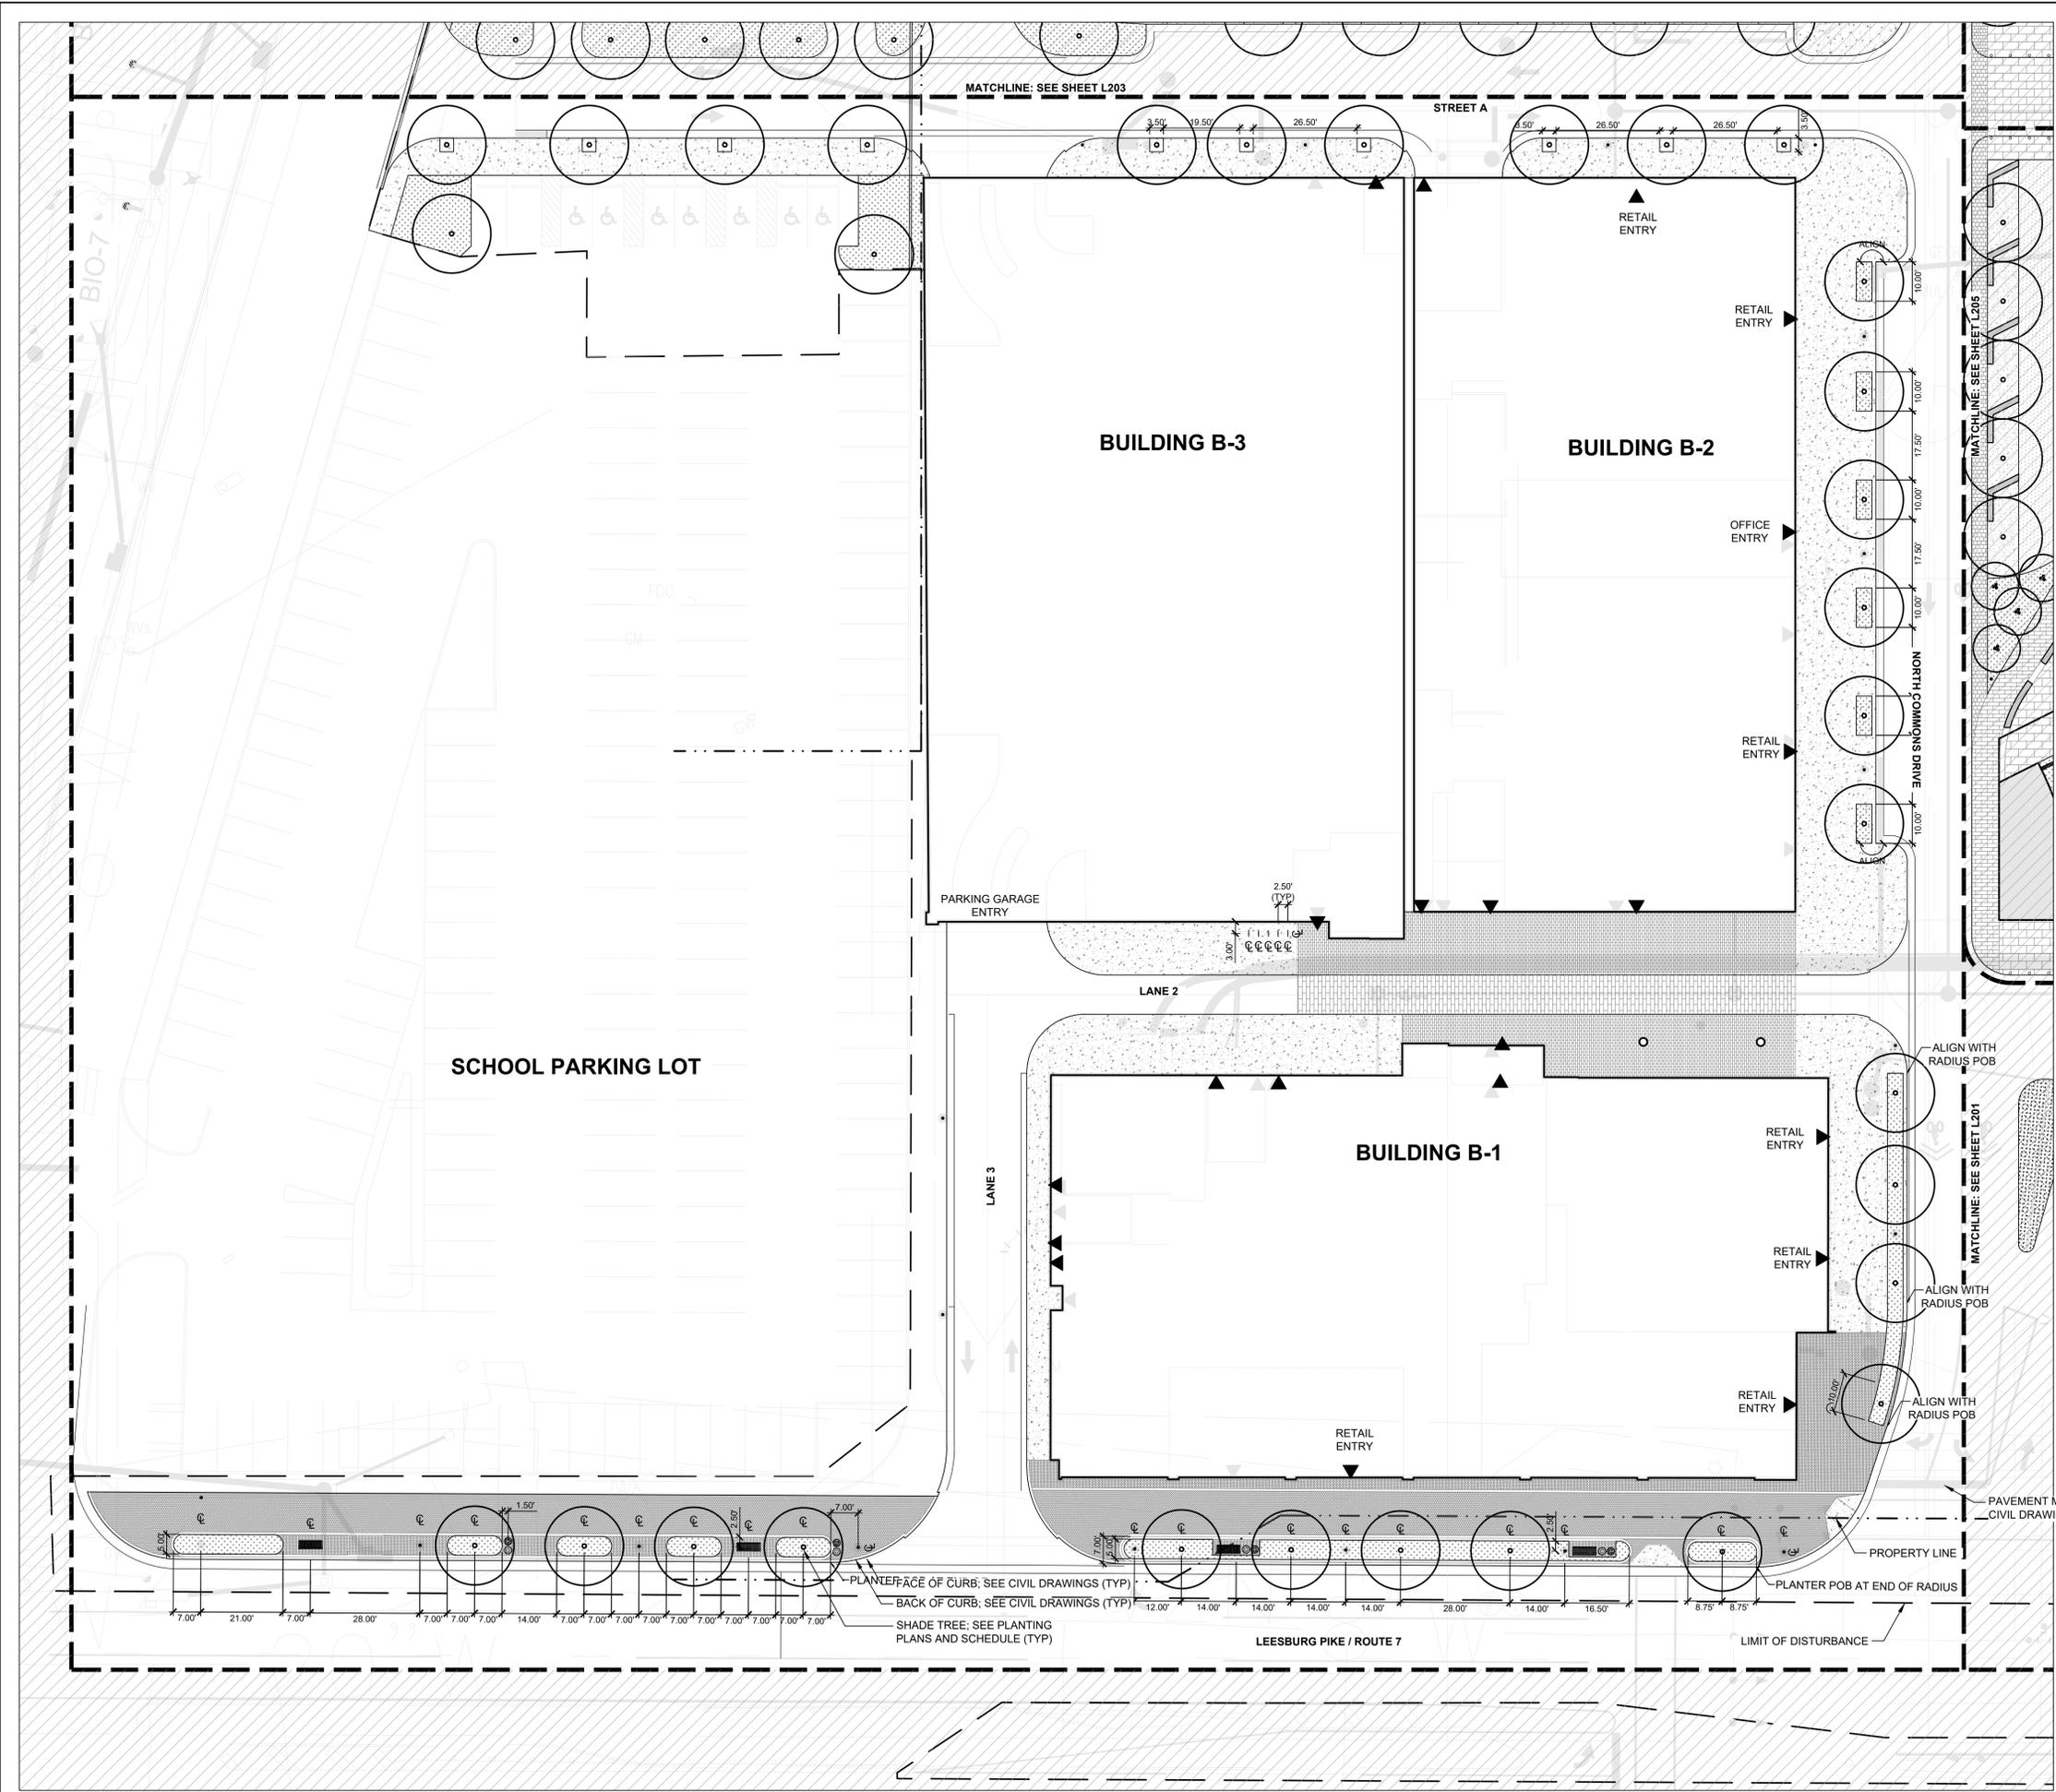

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH

EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDDESIGN PROJ.# 2019111


REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY: GCC
DRAWN BY: SW, MB
CHECKED BY: MB

SCALE: NORTH

VERT: N/A
HORZ: 1"=20'



SHEET TITLE

LAYOUT PLAN - BLOCK B

SHEET NUMBER

L202

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH


EYA
 4800 HAMPDEN LN #300
 BETHESDA, MD 20814

LANDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020



DESIGNED BY: GCC
 DRAWN BY: SW, MB
 CHECKED BY: MB





SHEET TITLE

LAYOUT PLAN - COMMONS

SHEET NUMBER
L205

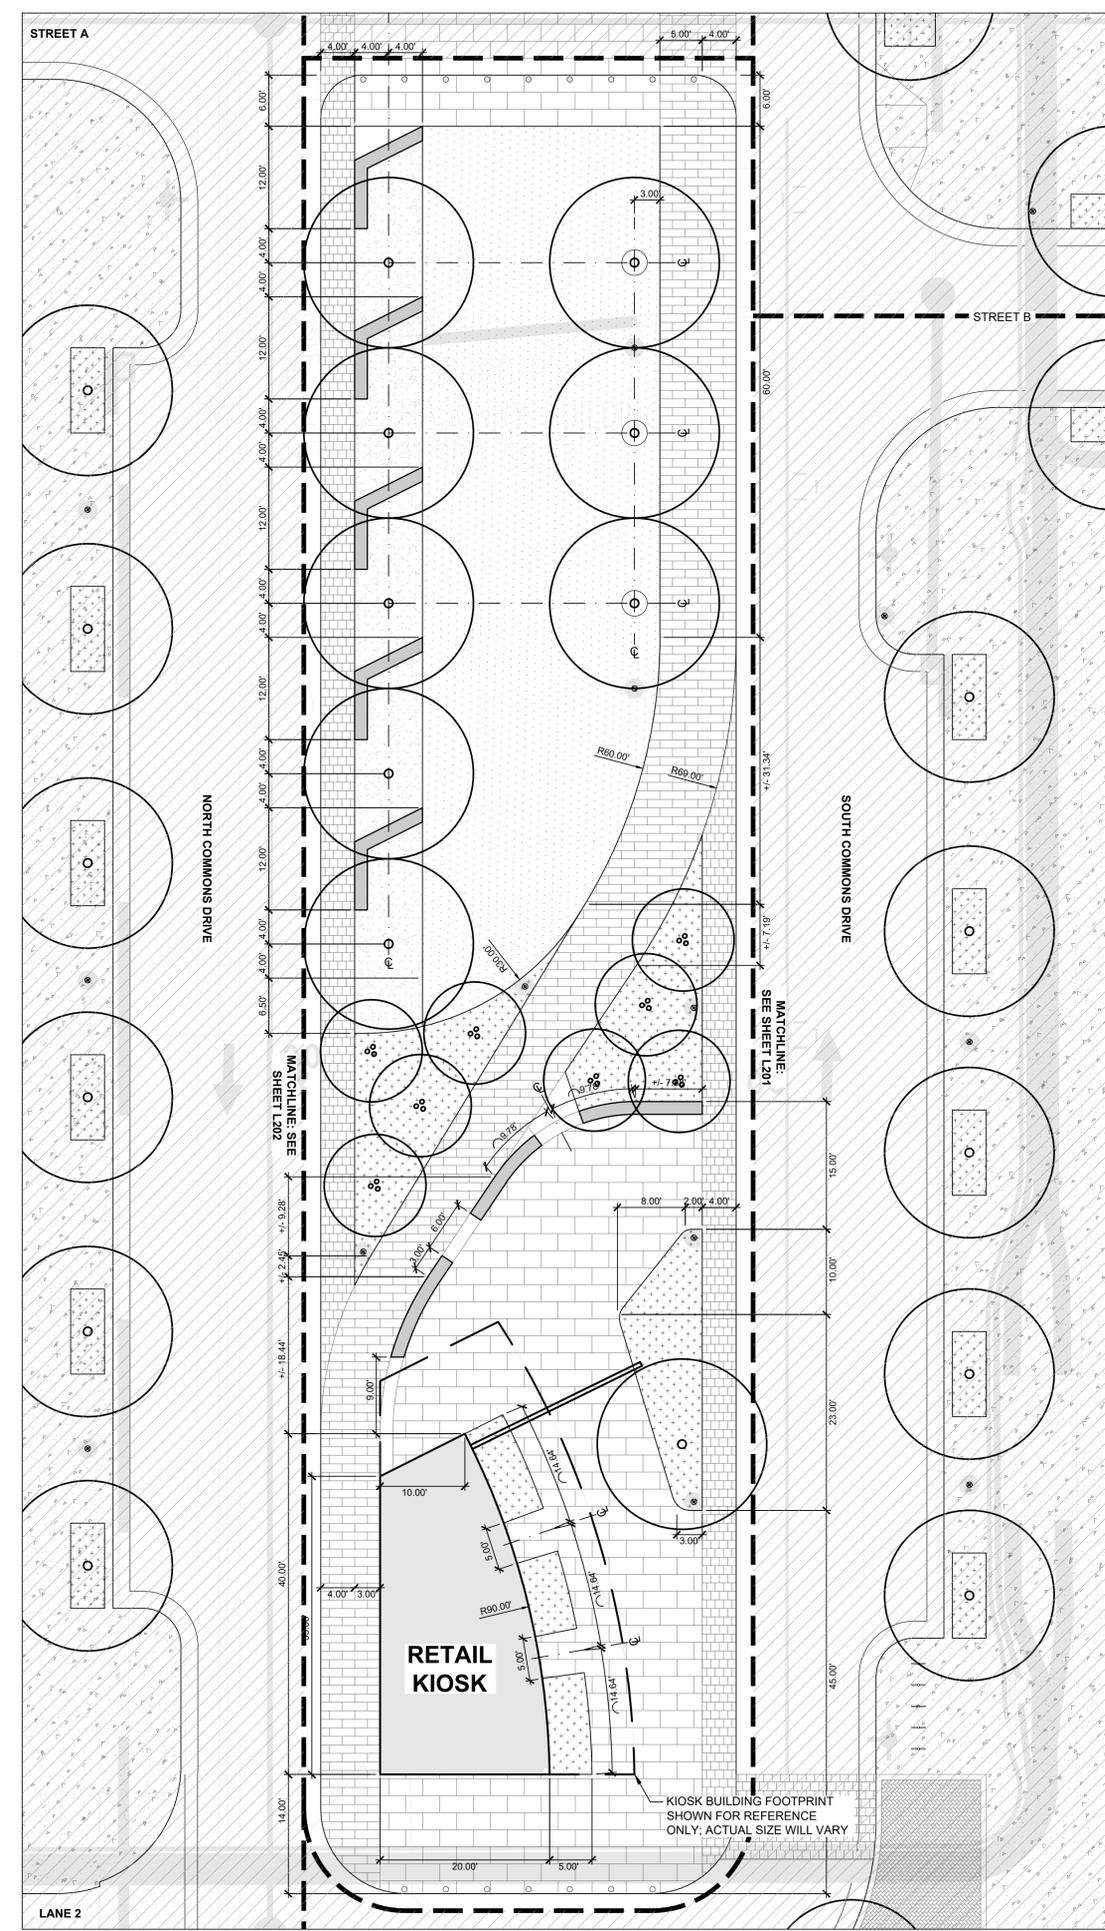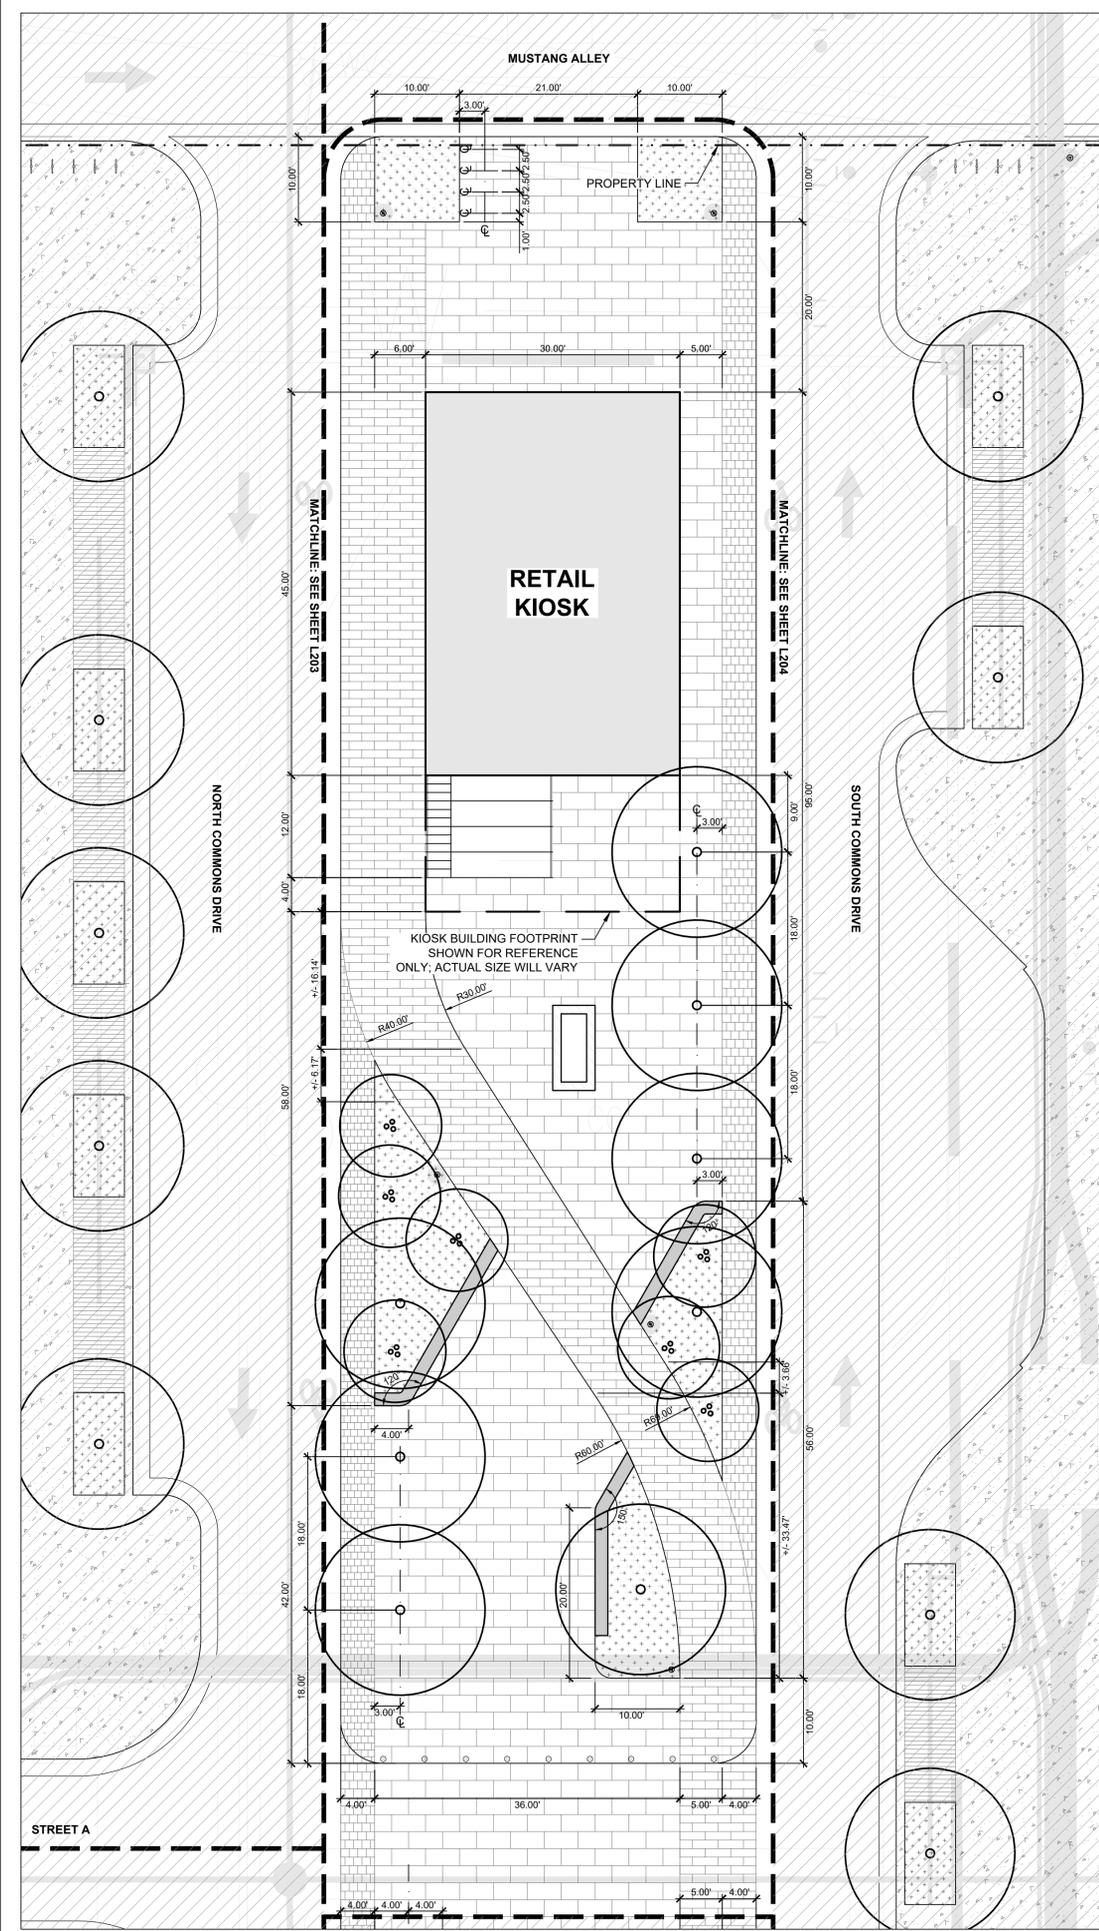

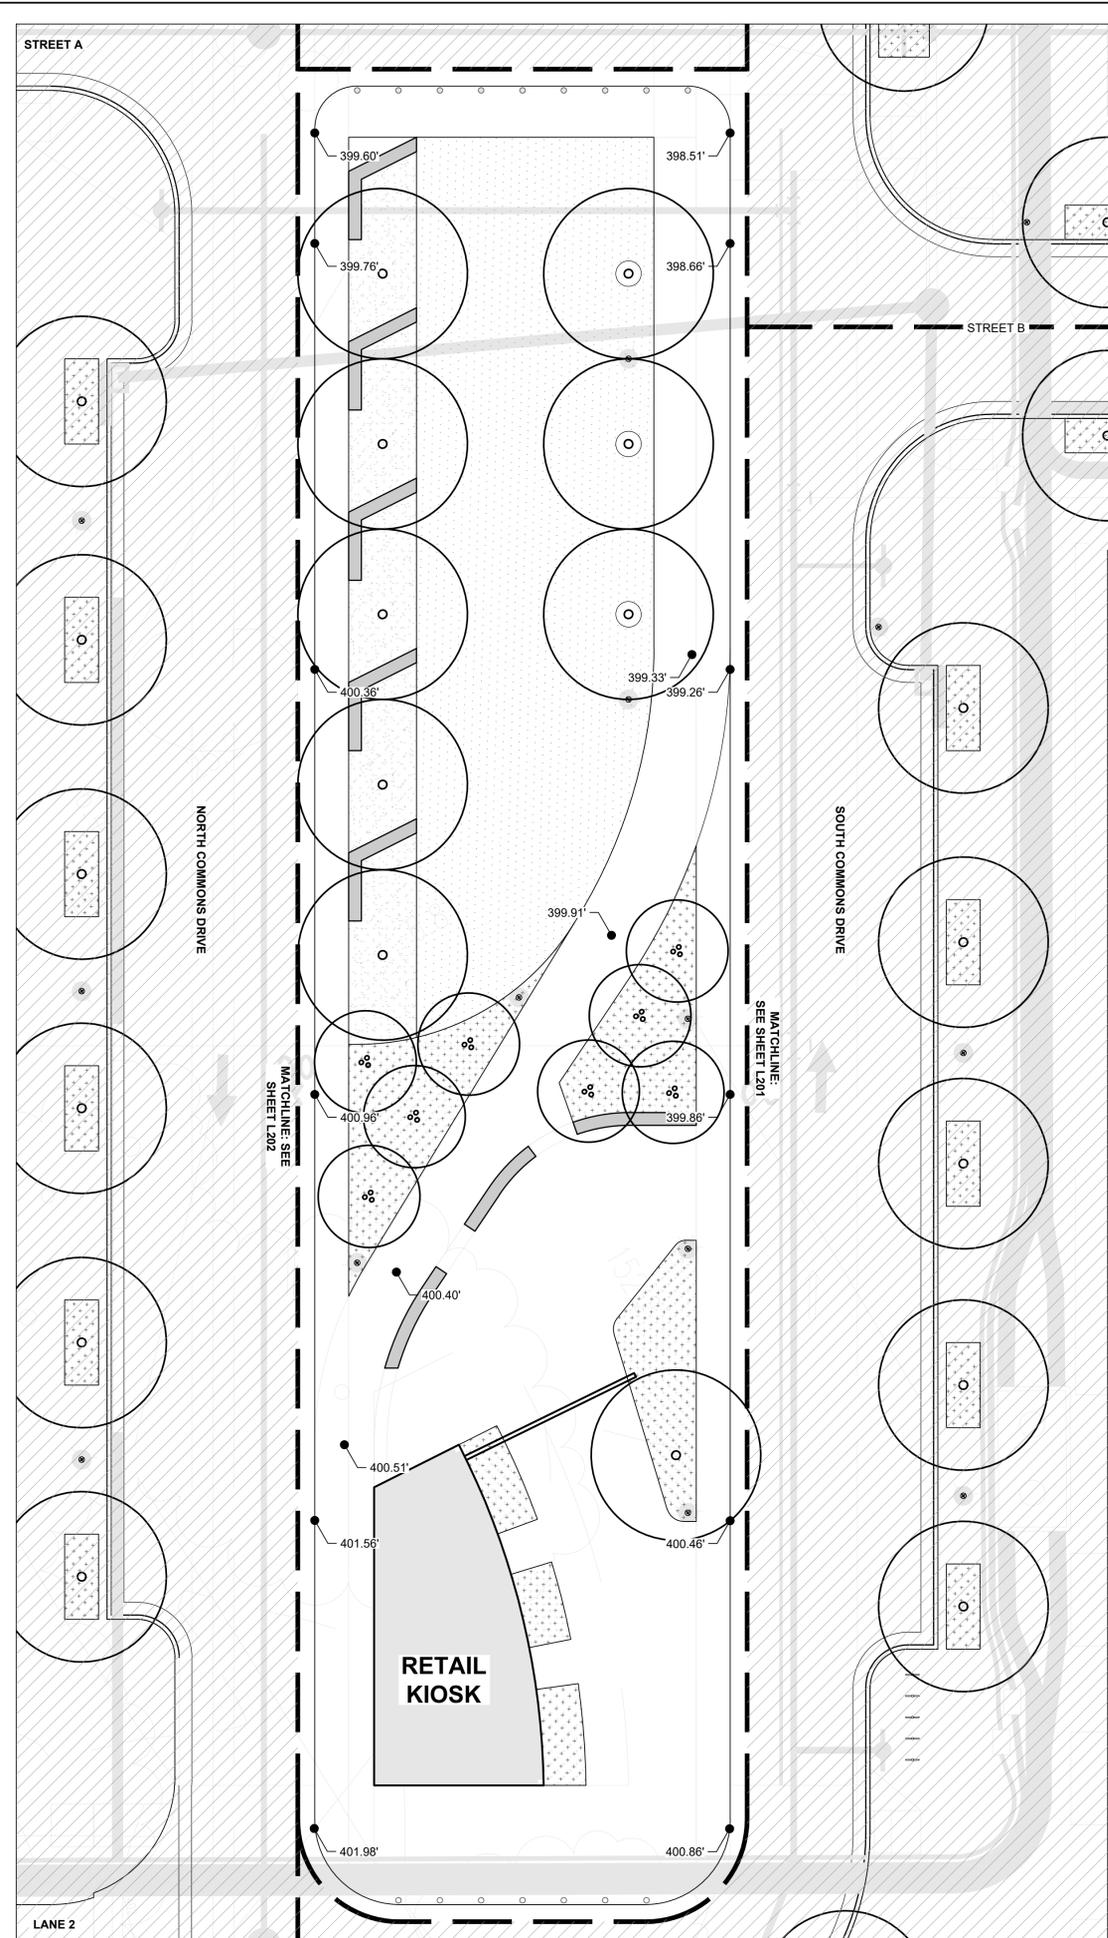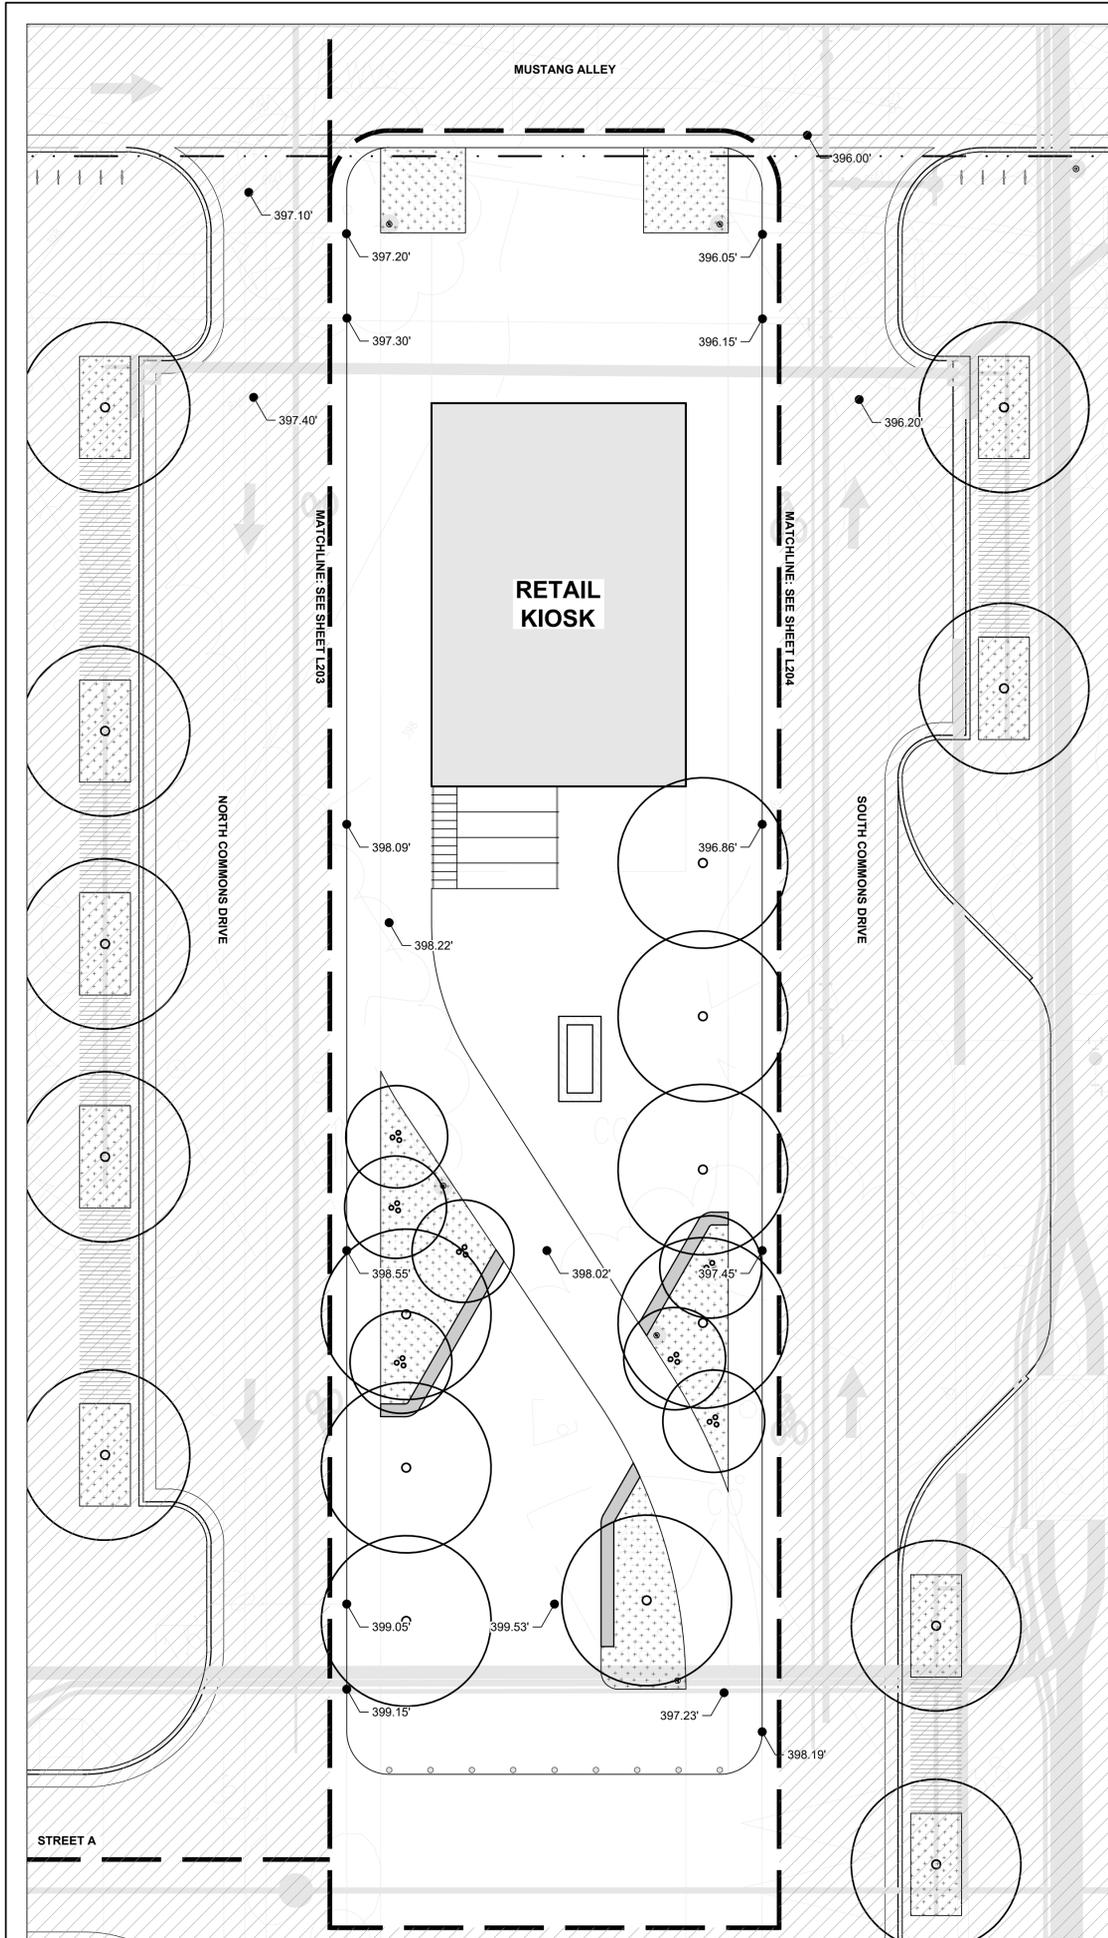

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH


EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:



SHEET TITLE

GRADING PLAN - COMMONS


SHEET NUMBER

L305

PLANT SCHEDULE BLOCK A

TREES	CODE	QTY	COMMON NAME
	ACE AU3	13	AUTUMN BLAZE RED MAPLE
	PLA OCC	9	AMERICAN SYCAMORE
	ULM PRI	7	AMERICAN ELM

SHRUB AREAS	CODE	QTY	COMMON NAME
	BR	1,033 SF	
	SA	4,248 SF	

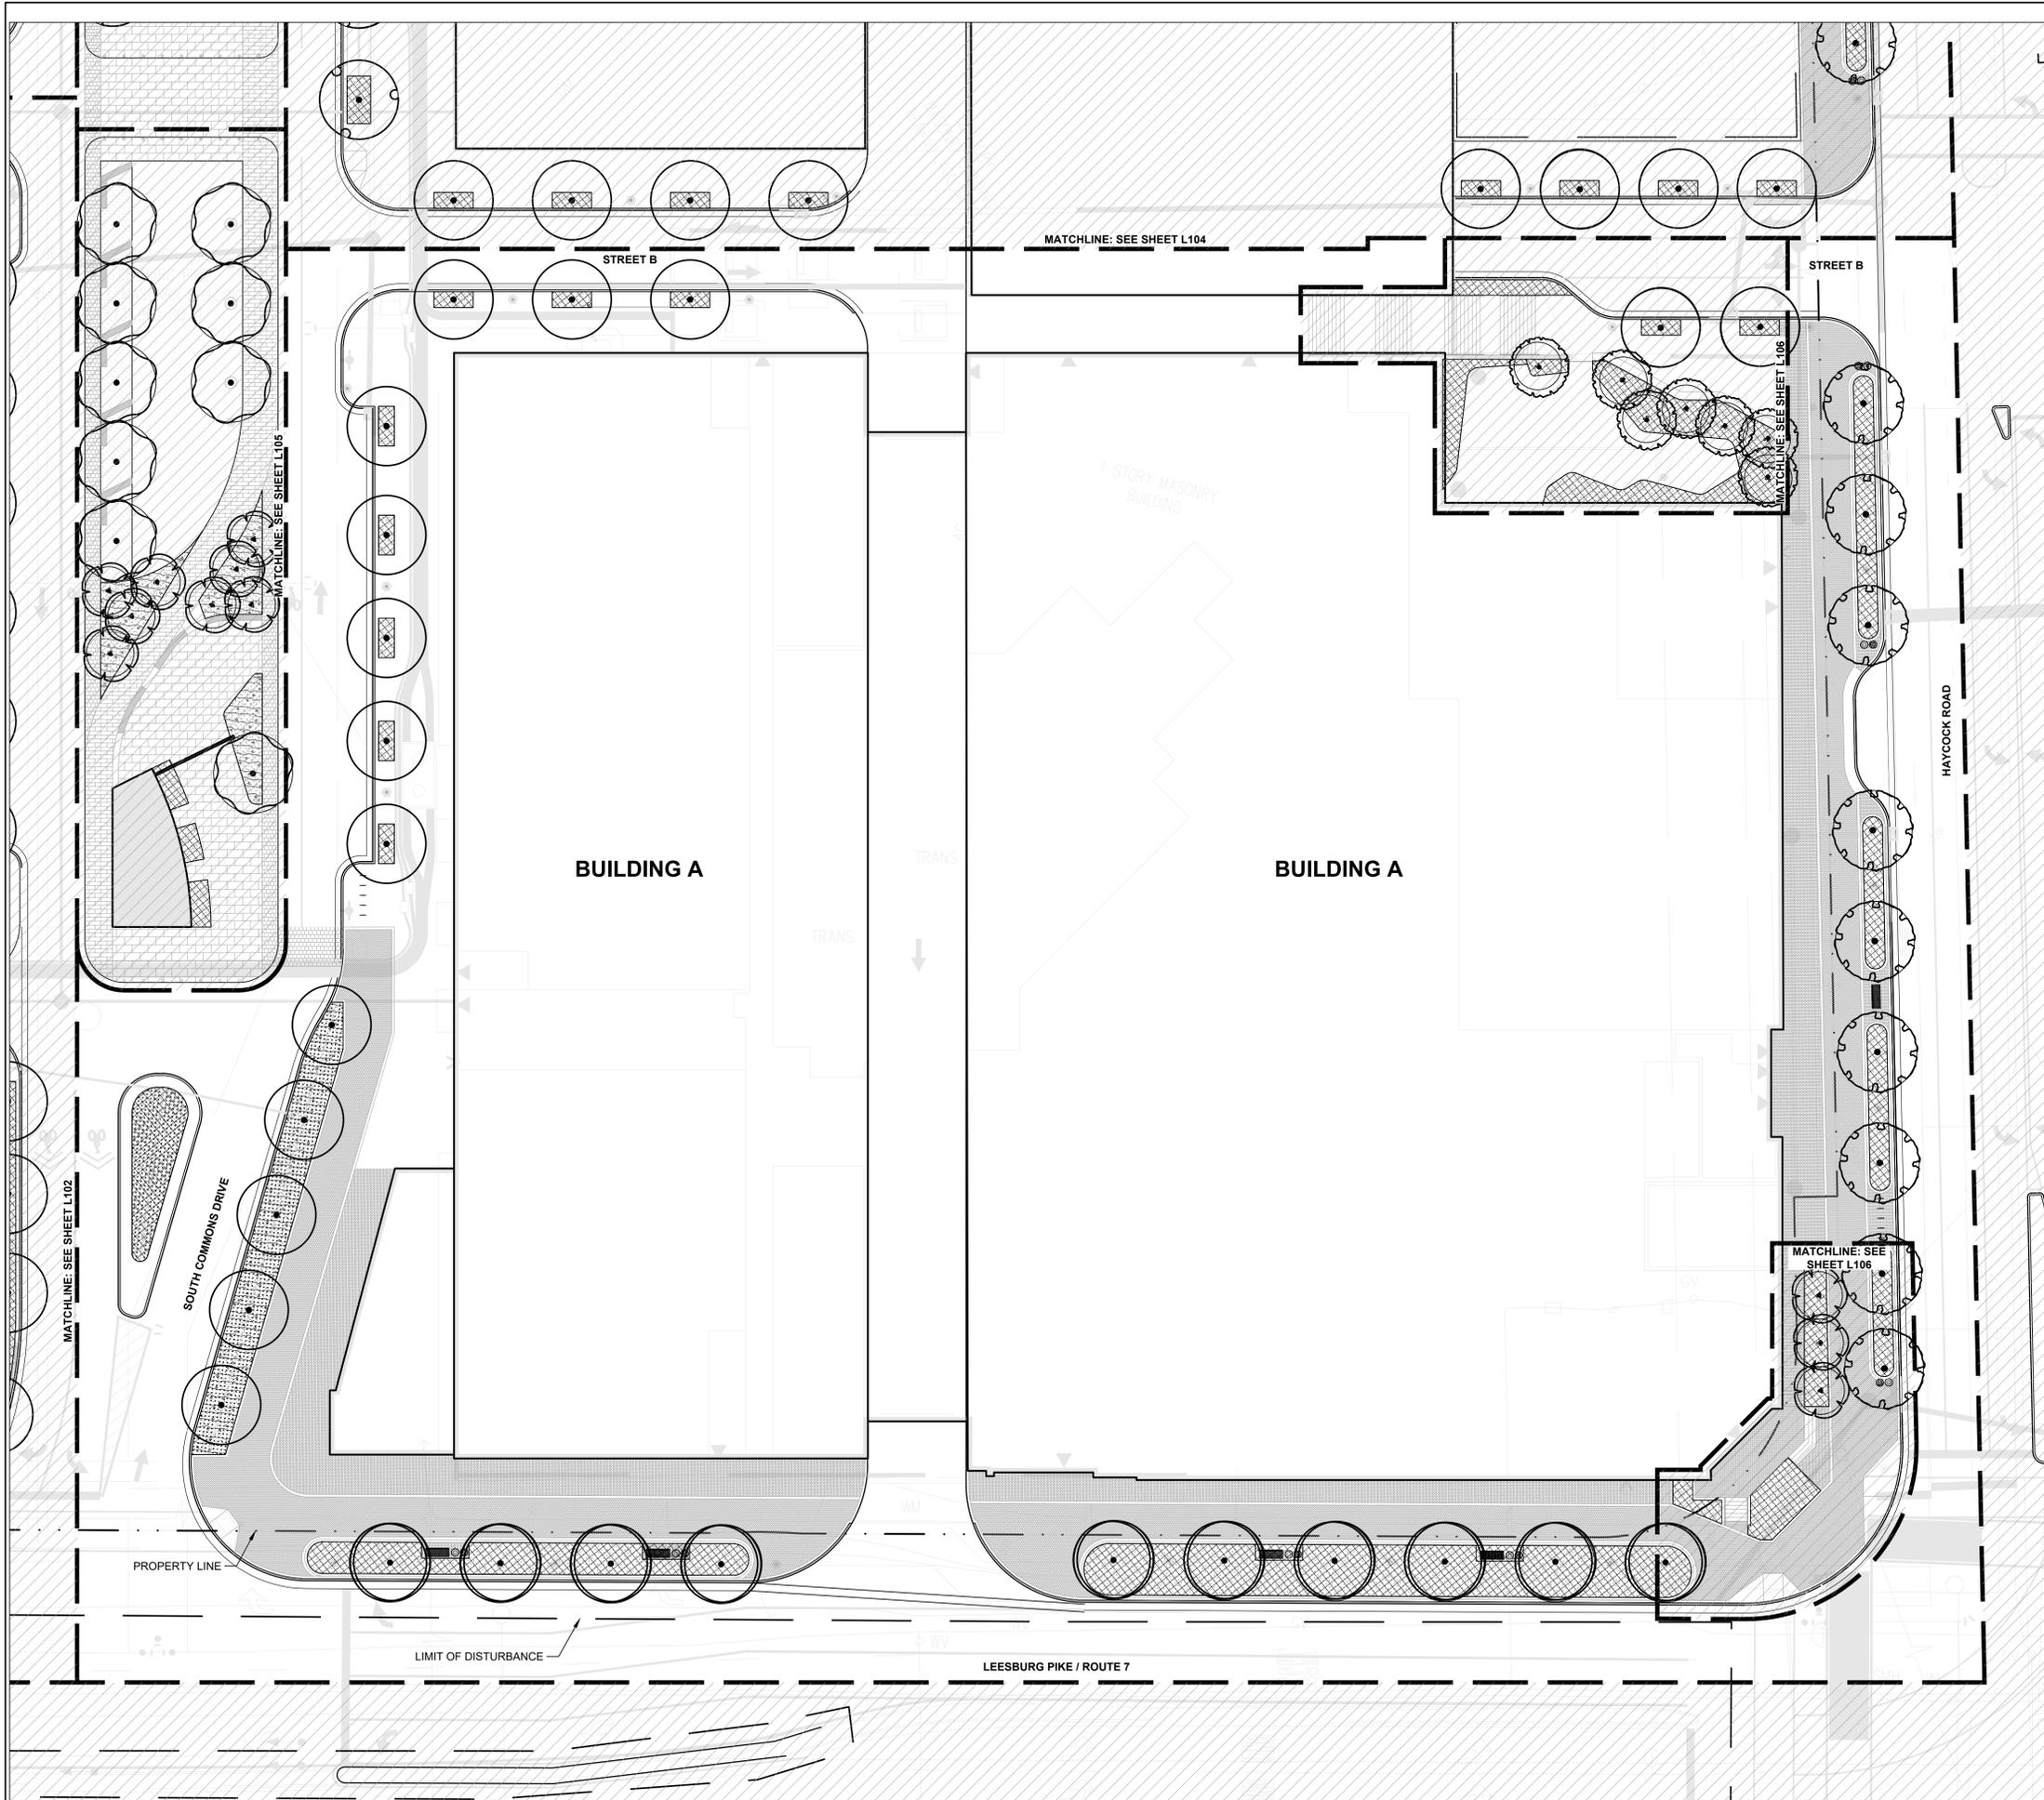

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH


EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:



SHEET TITLE

PLANTING PLAN - BLOCK A


SHEET NUMBER

L401

PLANT SCHEDULE BLOCK D

TREES	CODE	QTY	COMMON NAME
	ACE AU3	8	AUTUMN BLAZE RED MAPLE
	ACE LEG	4	LEGACY SUGAR MAPLE
	PLA OCC	9	AMERICAN SYCAMORE
	ULM PRI	19	AMERICAN ELM

SHRUB AREAS	CODE	QTY	COMMON NAME
	BR	144 SF	
	SA	6,104 SF	

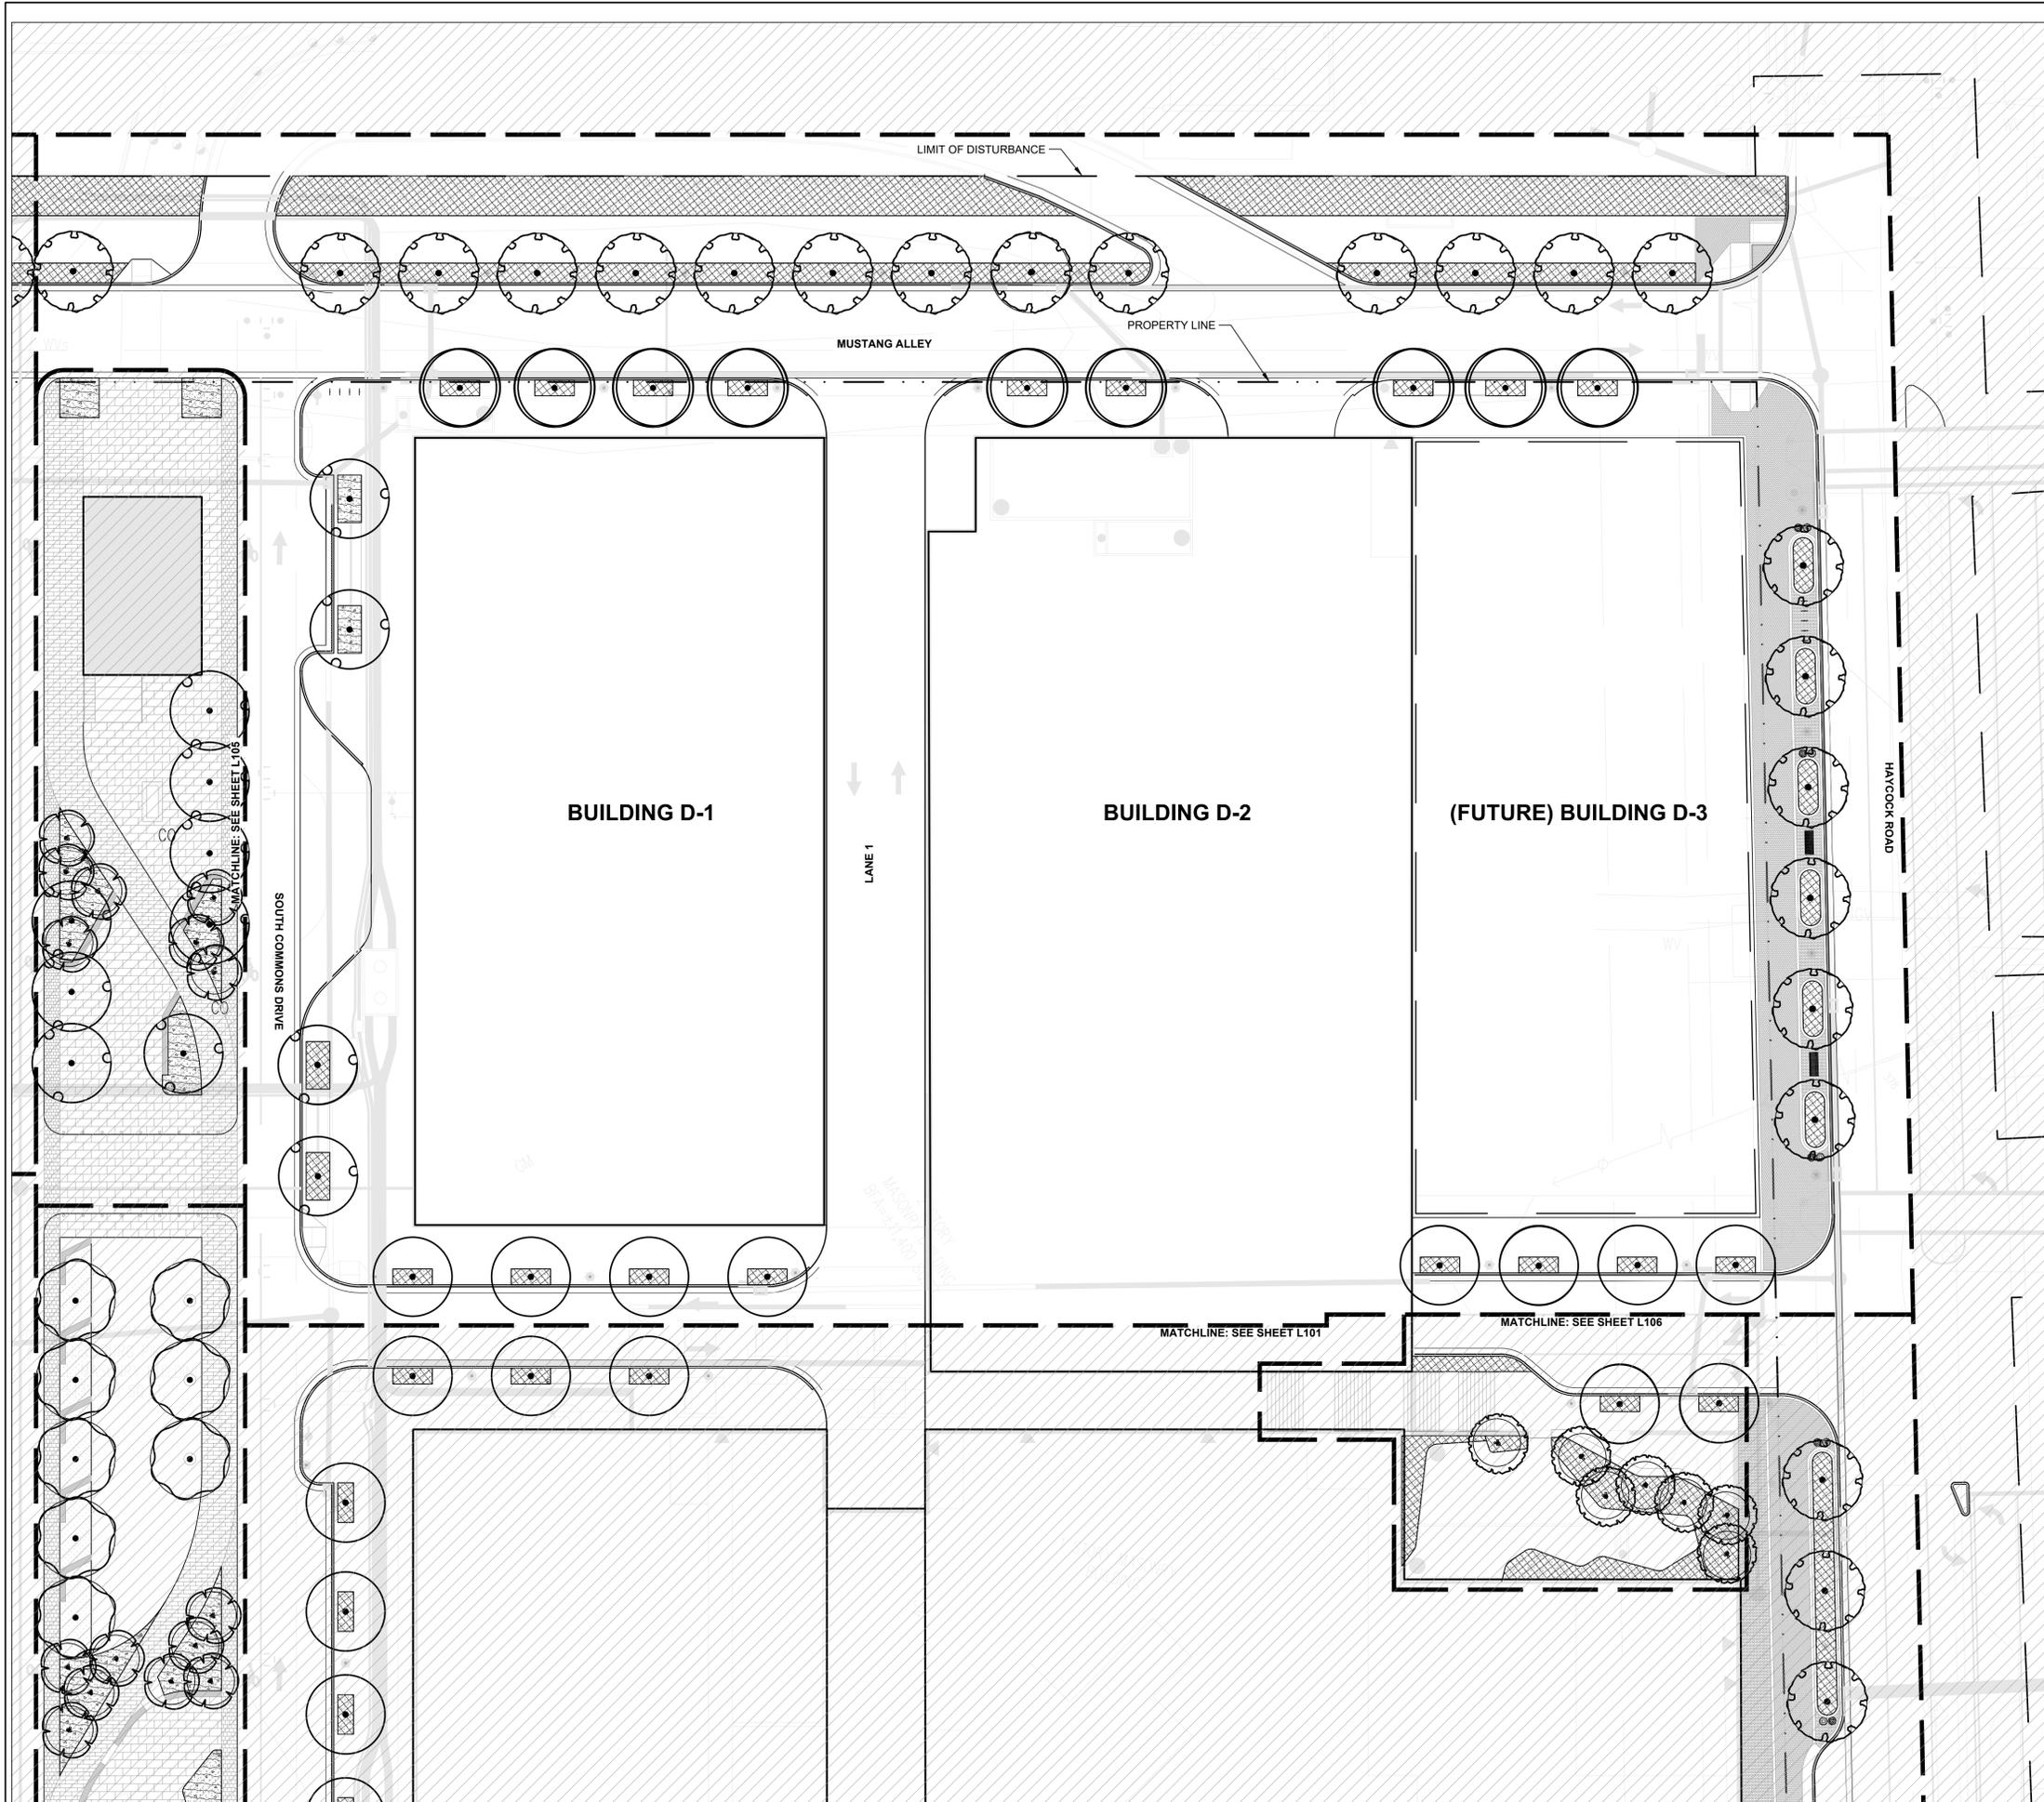

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH


EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDESIGN PROJ.# 2019111

REVISION / ISSUANCE



NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:



SHEET TITLE
PLANTING PLAN - BLOCK D

SHEET NUMBER
L404

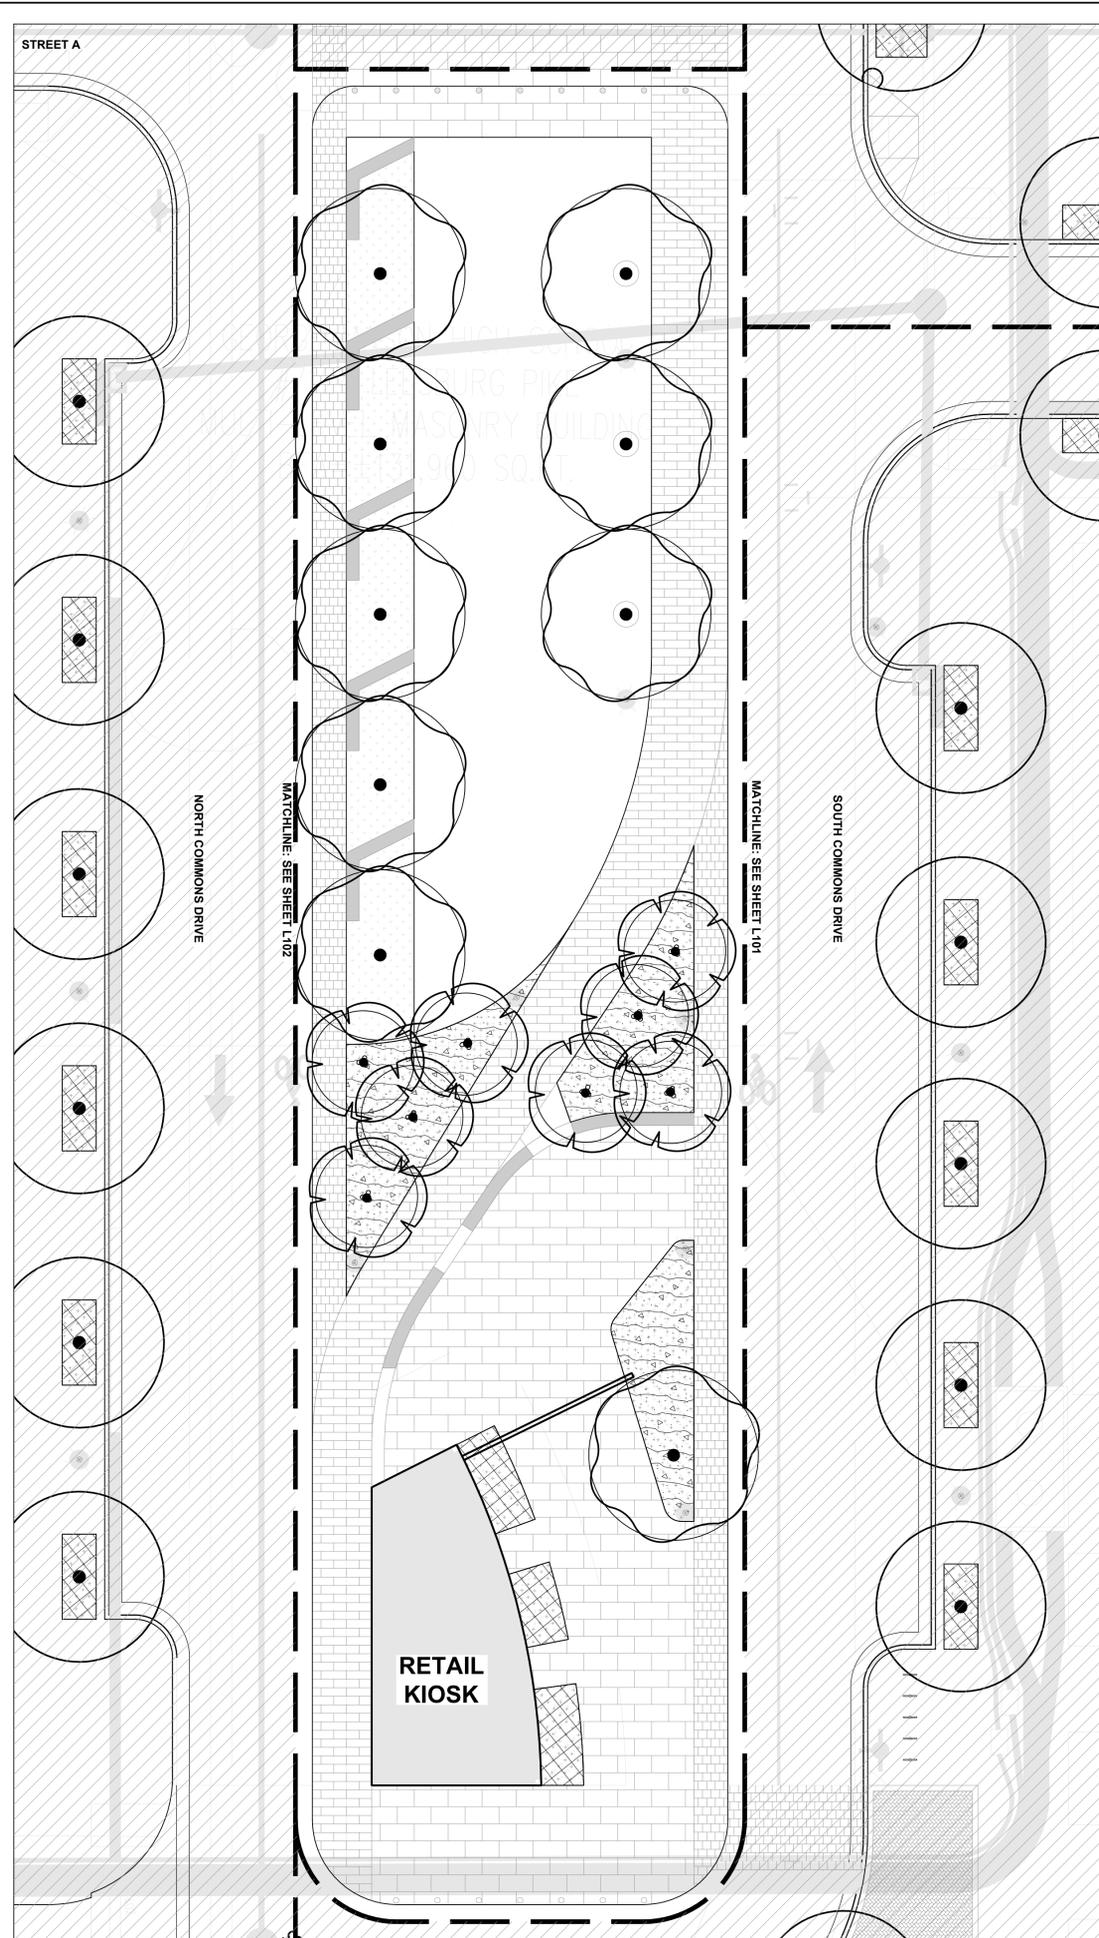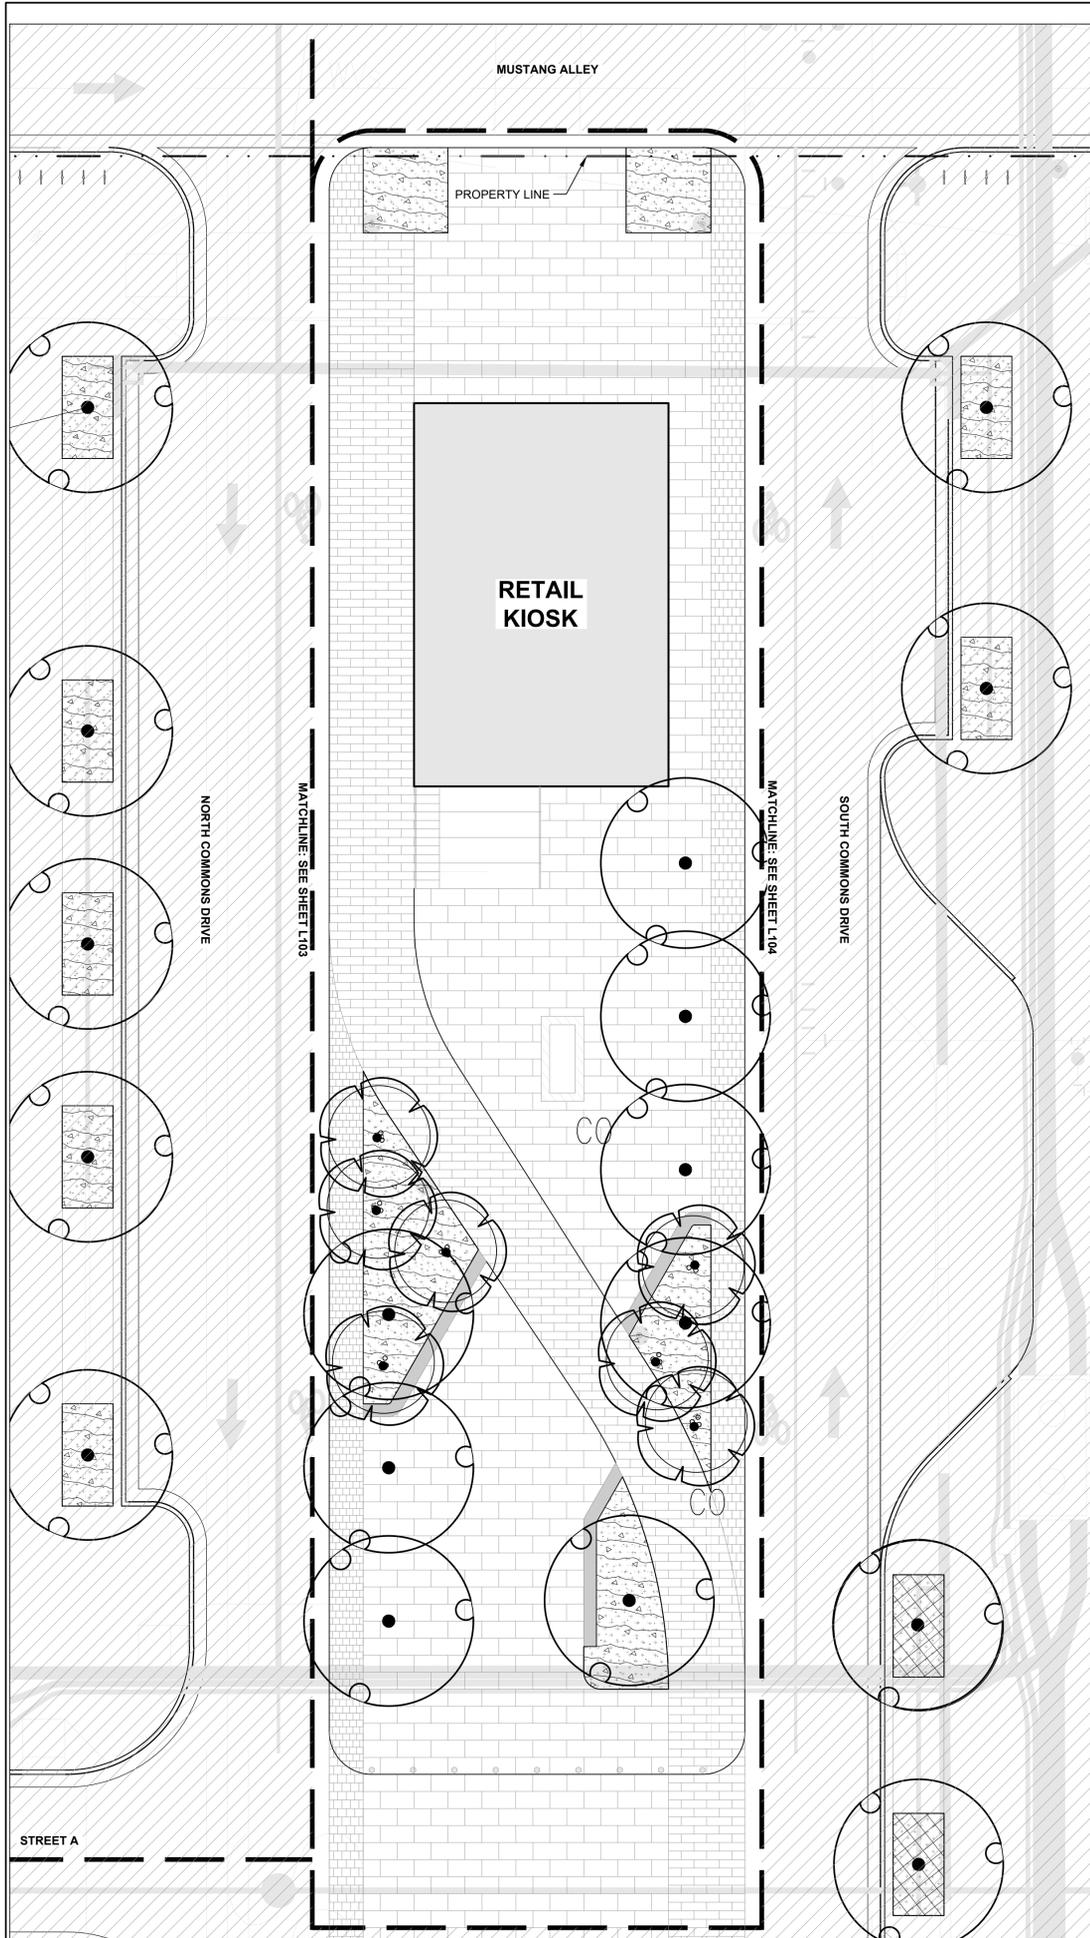

PLANT SCHEDULE COMMONS

TREES	CODE	QTY	COMMON NAME
	ACE LEG	8	LEGACY SUGAR MAPLE
	NYS BLK	15	SOUR GUM
	QUE AUR	9	AUREA RED OAK

SHRUB AREAS	CODE	QTY	COMMON NAME
	BR	1,586 SF	
	SA	162 SF	

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH


EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDDESIGN PROJ.# 2019111

REVISION / ISSUANCE


NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:



PLANTING PLAN - COMMONS


SHEET NUMBER
L405

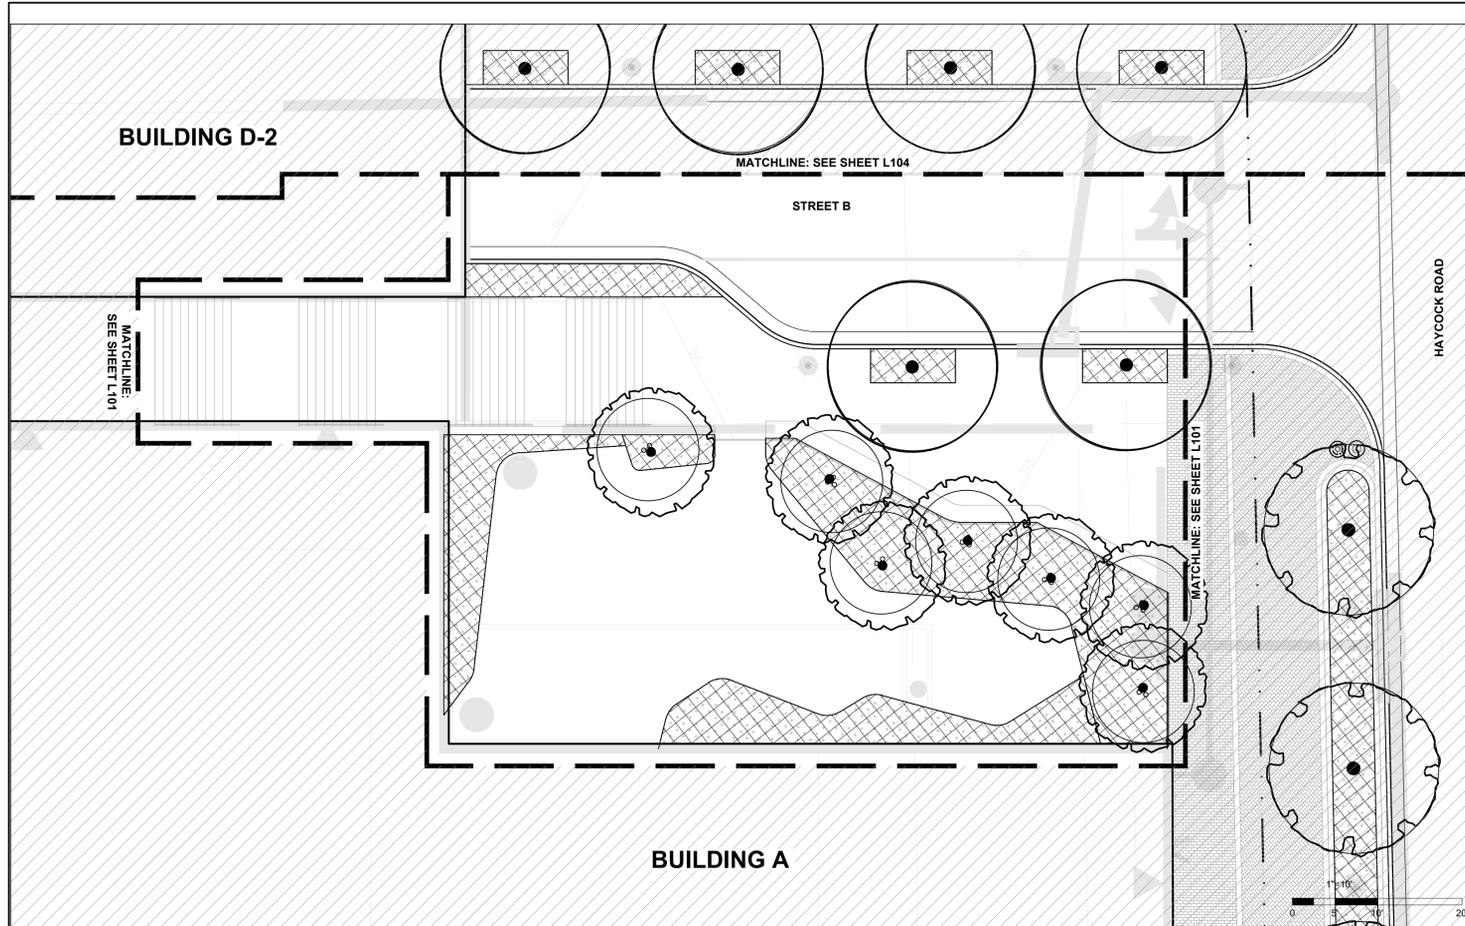

PLANT SCHEDULE EASTERN CORNER

TREES	CODE	COMMON NAME	QTY
	ACE AU3	AUTUMN BLAZE RED MAPLE	2
	GLE INE	SKYLINE THORNLESS HONEY LOCUST	7

SHRUB AREAS	CODE	COMMON NAME	QTY
	SA		1,211 SF

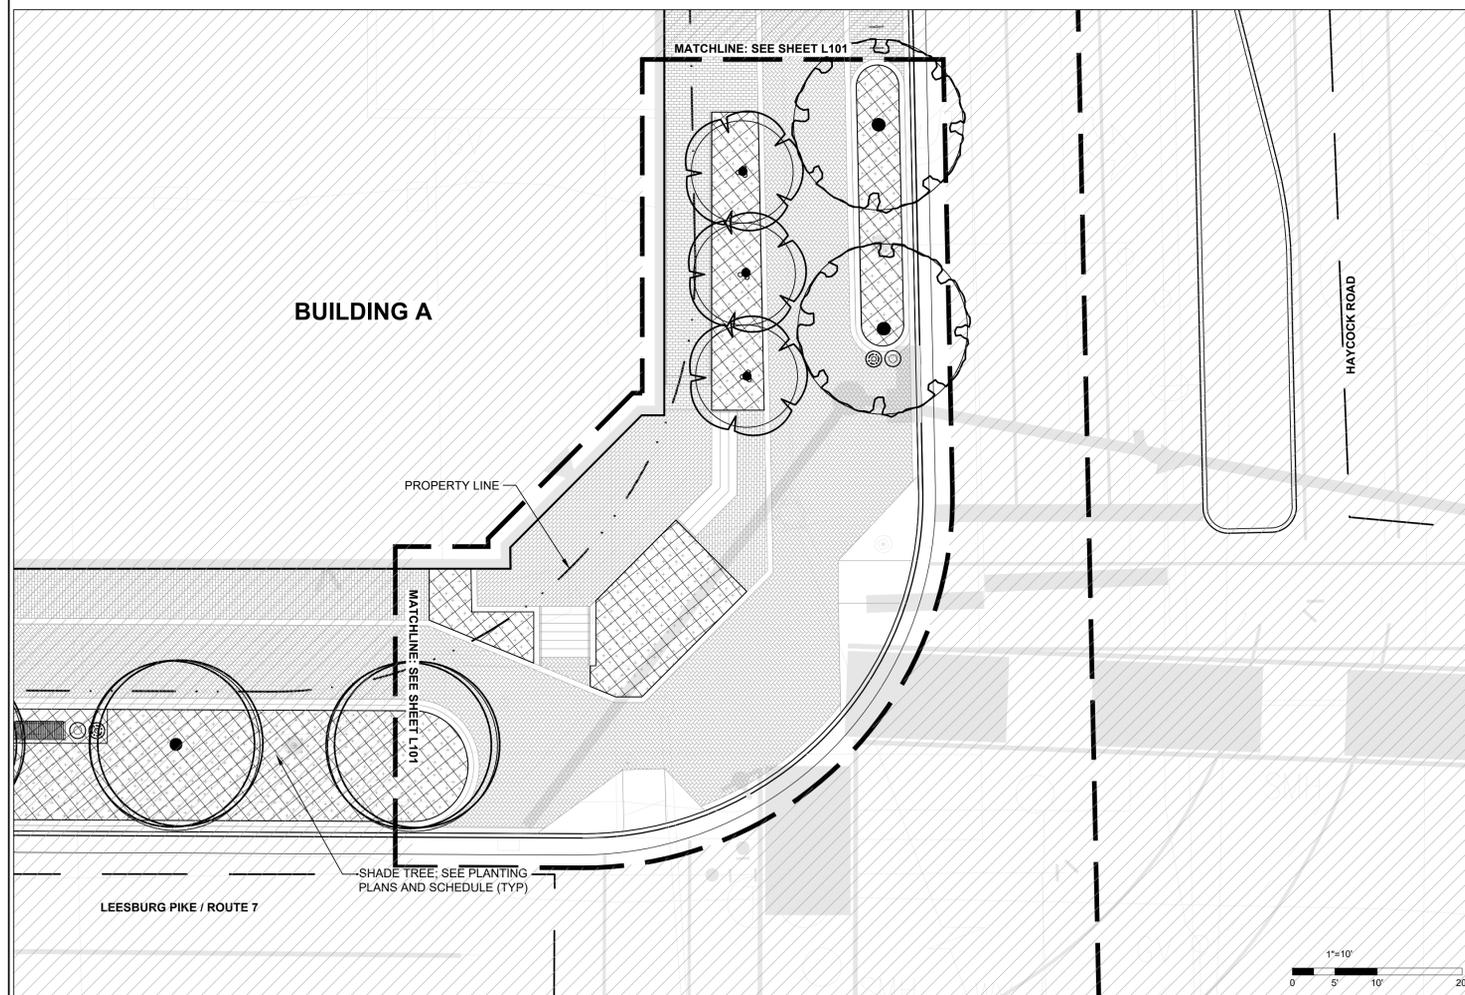

PLANT SCHEDULE SOUTHERN CORNER


TREES	CODE	COMMON NAME	QTY
	NYS BLK	SOUR GUM	3
	PLA OCC	AMERICAN SYCAMORE	1
	ULM PRI	AMERICAN ELM	2

SHRUB AREAS	CODE	COMMON NAME	QTY
	SA		645 SF

PLANT SCHEDULE M.E.H. SIDEWALK

TREES	CODE	BOTANICAL / COMMON NAME	QTY
	PLA OCC	PLATANUS OCCIDENTALIS / AMERICAN SYCAMORE	5

SHRUB AREAS	CODE	BOTANICAL / COMMON NAME	QTY
	SA	SHRUB AREA	3,017 SF

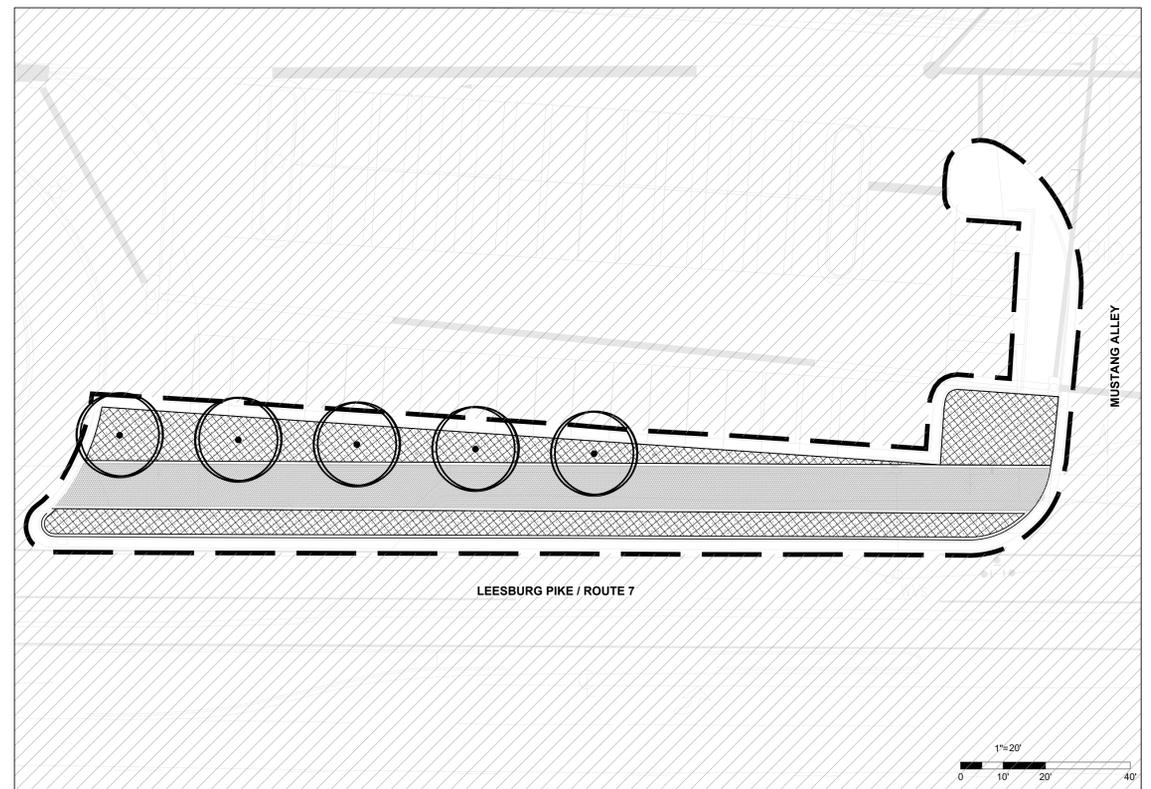

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH

EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:

SCALE: NORTH


VERT: N/A
HORZ: AS NOTED

SHEET TITLE

PLANTING PLAN - BLOCK A ENLARGEMENTS


SHEET NUMBER

L406

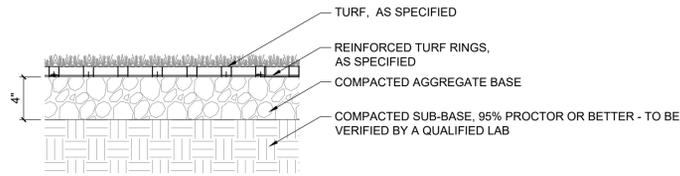

1 SYNTHETIC TURF 1
L512 SECTION

1 1/2" = 1'-0"

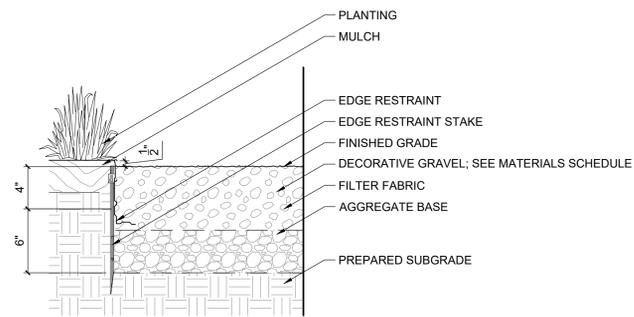

2 DECORATIVE GRAVEL 1
L512 SECTION

1 1/2" = 1'-0"

KEY MAP

SEAL



PROJECT

WEST FALLS CHURCH

EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY: GCC
DRAWN BY: SW, MB
CHECKED BY: MB

SCALE: NORTH

VERT: N/A
HORZ:

SHEET TITLE

DETAILS - PAVING

SHEET NUMBER

L512

VICTOR STANLEY, INC.
Manufacturers of Quality Site Furnishings since 1962.

P.O. DRAWER 330 - DUNKIRK, MD 20754 USA
TOLL FREE: (800) 368-2573 (USA & CANADA)
TEL: (301) 855-8300 - FAX: (410) 251-7579
WEB SITE: HTTP://WWW.VICTORSTANLEY.COM

1/4" x 2" HORIZONTAL SOLID STEEL BAND
(24) 1/4" x 2" VERTICAL SOLID STEEL BARS
36-GALLON CAPACITY HIGH DENSITY PLASTIC LINER (WEIGHT NOT TO EXCEED 6 LBS.) SITS ON 1/4" x 1" SUPPORT BARS
(4) LEVELING FEET WITH A 3/8" DIAMETER THREADED STEEL SHAFT
3/4" SQUARE CENTER ANCHOR BOLT HOLE

AVAILABLE OPTIONS:
POWER COATING TO STANDARD COLORS, 2 OPTIONAL METALLIC COLORS, CUSTOM COLORS INCLUDING THE RAL RANGE
CUSTOM PLAKES & DECALS AVAILABLE WITH STEEL PLAKES IN VARIOUS SIZES AND PRESSURE SENSITIVE VINYL OUTDOOR DECALS

LEGS STANDARD TAPERED FORMED LD (AS SHOWN). AVAILABLE WITH OPTIONAL S-20 FORMED DOME, S-20 FORMED DOME WITH STAINLESS STEEL ASHTRAY, AND BS-12 FORMED DOME WITH SELF CLOSING DOOR.

SECURITY: LD IS SECURED WITH VINYL COATED GALVANIZED STEEL AIRCRAFT CABLE. CABLE IS LOOPED AROUND WELDED IN PLACE ATTACHMENT BRACKETS AND CRIMPED IN PLACE.

NOTES:
1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL, SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PREHEATED, PREHEATED AND COATED WHILE HOT TO FULL CURE AND BOND. FILM COATING COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGE IS 8-10 MILS (200-250 MICRONS).
3. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. VICTOR STANLEY, INC. PLASTIC LINER LINERS ARE MOLDED ON TOOLING DESIGNED FOR AND OWNED BY VICTOR STANLEY, INC. THEY OFFER MAXIMUM CAPACITY AND STRENGTH WITH LIGHTWEIGHT CONSTRUCTION USING CRITICAL MOLDED REEL, INTERNAL HANDLES, AND HIGH-STRENGTH MATERIALS. THIS MINIMIZES HANDLING DIFFICULTY AND FACILITATES EASY EMPTYING AND STORAGE WHILE MAINTAINING LONG SERVICE LIFE.
5. ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
6. FOR HIGH SALT AMBIENT CLIMATES, HOT-DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. SEE WRITTEN SPECIFICATIONS FOR DETAILS.
7. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
8. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.

FC-12
CONCOURSE SERIES

36-GALLON LITTER RECEPTACLE
SHOWN: STANDARD TAPERED FORMED LD

COPYRIGHT 2006 VICTOR STANLEY, INC. ALL RIGHTS RESERVED.
REV. 12/15/06 DRAWN: M.C.W. 2006-258

1 TRASH RECEPTACLE
L531 SECTION

NTS

VICTOR STANLEY

CREATE A TIMELESS MOMENT.SM

* ALL DIMENSIONS ARE IN INCHES *

FRONT WELDS ARE POLISHED UNTIL THEY DISAPPEAR, FORMING A CONTINUOUS SURFACE.
STEEL SLATS ARE FORMED FROM 1/4" x 1-1/2" SOLID STEEL BARS
SEAT HEIGHT: 17"
24-3/8"
FINISHED END UNIT IS MADE FROM 1/2" x 2" SOLID STEEL BAR
1-5/8" TUBULAR STEEL USED FOR ADDITIONAL SUPPORT
1/8" x 1" SOLID STEEL BARS ARE WELDED UNDERNEATH FOR ADDITIONAL SUPPORT
FINISHED END UNITS JOIN TO SEATING SECTION WITH FASTENERS
72-1/2"
70-1/2" CENTER-TO-CENTER

AVAILABLE OPTIONS:
POWER COATING TO STANDARD COLORS, 2 OPTIONAL METALLIC COLORS, CUSTOM COLORS INCLUDING THE RAL RANGE
INTERMEDIATE & CENTER ARMRESTS 4", 6", & 8" AVAILABLE WITH OPTIONAL SOLID STEEL ARMRESTS

LENGHS STANDARD 4" STANDARD 6" (AS SHOWN) STANDARD 8"

NOTES:
1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL, SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PREHEATED, PREHEATED AND COATED WHILE HOT TO FULL CURE AND BOND. FILM COATING COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGE IS 8-10 MILS (200-250 MICRONS).
3. IT IS NOT RECOMMENDED TO LOCATE ANCHOR BOLTS UNTIL LOCAL CODES FOR REGULATIONS.
4. ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
5. FOR HIGH SALT AMBIENT CLIMATES, HOT-DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. HOT-DIP GALVANIZING IS PERFORMED FOR VICTOR STANLEY, INC. BY AN EXPERIENCED QUALIFIED FIRM TO WHICH PRODUCTS ARE SHIPPED FOR GALVANIZING. HOT-DIP GALVANIZING INCLUDES AN AGGRESSIVE PRE-TREATMENT AND IMMERSION IN A TANK OF CHARGED LIQUID ZINC AT OR ABOVE 800°F (400°C). THE RESULTING SURFACE IS RESISTANT TO RUST BUT HAS SOME UNIFORMITY RESULTING FROM THE BONDING OF THE ZINC TO THE STEEL SURFACE. AS A RESULT OF THE POWDER-COATING SURFACE FINISH OVER THIS GALVANIZED SURFACE MAY COVER BUMPS, IRREGULARITIES, AND MAY NOT BE AS SMOOTH AS THE STANDARD FINISH. THIS UNIFORM AND INCONSISTENT FINISH IS NORMAL FOR GALVANIZING. CONTACT MANUFACTURER FOR DETAILS.
6. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
7. THIS PRODUCT IS SHIPPED PARTIALLY UNASSEMBLED.

RB-28
STEELSLATS™ RB

ALL STEEL CONToured BENCH SHOWN: STANDARD 6-FOOT LENGTH

COPYRIGHT 2006 VICTOR STANLEY, INC. ALL RIGHTS RESERVED.
REV. 12/15/06 DRAWN: T.A.L. 2006-419

3 BENCH
L531 SECTION

NTS

#1 VENTED FINIAL CAST ALUM.
SOLID SPUN TOP
K118 RIPPLED ACRYLIC GLOBE
LED EMITTER ARRAY C/W OPTICAL CONTROL BAFFLES
OCTAGONAL EXTRUDED ALUMINUM HEAT SINK
ROTOLOCK RING ASSEMBLY
ELECTRONIC LED DRIVER
K16 CAST ALUMINUM CAPITAL
(3) 3/8" x 3/4" ST. STL. CUP-TIP SET SCREWS @ 120° APART
TO ACCEPT A 3 1/2" O.D x 3 1/2" LONG TENON

4'-11"
1'-5"

LUMINAIRE SPECIFICATIONS
CATALOGUE NO.: K118R-BAAR-III-V-60 OR 100(SS) -5000 OR 8000-120-277V-K16-SST
QUANTITY: ROTOLOCK
GLOBE MOUNTING: BAFFLED ARRAY ACRYLIC RIPPLED
OPTICAL SYSTEM: TYPE III/V
IES CLASS.: 60W OR 100W
INPUT WATTAGE: SOLID STATE LIGHTING
SERIES: 5000 OR 8000
CCT: 4500K
LINE VOLTAGE: 120-277V
POLE ADAPTOR: K16
PAINT: TEXTURED BLACK
OPTIONS: SOLID SPUN TOP

BALLAST SPECIFICATIONS
SUPPLIED ELECTRONIC
BALLAST TYPE: ELECTRONIC
BALLAST MANU.: -
CATALOGUE NO.: -

OTHER: 540 JOULE @ 2mS 20kA-8/20uS SURGE PROTECTION

MANUFACTURED BY:
KING LUMINAIRE COMPANY INC.
P.O. BOX 266
1153 STATE ROUTE 46N
JEFFERSON, OH 44047
WWW.STRESSCRETE.COM

5 POLE LIGHT FIXTURE
L531 SECTION

NTS

VICTOR STANLEY, INC.
Manufacturers of Quality Site Furnishings since 1962.

P.O. DRAWER 330 - DUNKIRK, MD 20754 USA
TOLL FREE: (800) 368-2573 (USA & CANADA)
TEL: (301) 855-8300 - FAX: (410) 251-7579
WEB SITE: HTTP://WWW.VICTORSTANLEY.COM

1/4" x 2" HORIZONTAL SOLID STEEL BAND
24 1/4" x 2" VERTICAL SOLID STEEL BARS
36-GALLON CAPACITY HIGH DENSITY PLASTIC LINER (WEIGHT NOT TO EXCEED 6 LBS.) SITS ON 1/4" x 1" SUPPORT BARS
(4) LEVELING FEET WITH A 3/8" DIAMETER THREADED STEEL SHAFT
3/4" SQUARE CENTER ANCHOR BOLT HOLE

AVAILABLE OPTIONS:
POWER COATING TO STANDARD COLORS, 2 OPTIONAL METALLIC COLORS, CUSTOM COLORS INCLUDING THE RAL RANGE
CUSTOM PLAKES & DECALS AVAILABLE WITH STEEL PLAKES IN VARIOUS SIZES AND PRESSURE SENSITIVE VINYL OUTDOOR DECALS

LEGS STANDARD TAPERED FORMED LD. AVAILABLE WITH OPTIONAL DOME LD, DOME LD WITH STAINLESS STEEL ASHTRAY, CONES LD, CONES LD WITH SELF-CLOSING DOOR, RAIN BOWNET LD, RAIN BOWNET LD WITH STAINLESS STEEL ASHTRAY, AND RECYCLE LD (AS SHOWN) AVAILABLE WITH OPTIONAL AIRFLOW COVER.

SECURITY: LD IS SECURED WITH VINYL COATED GALVANIZED STEEL AIRCRAFT CABLE. CABLE IS LOOPED AROUND WELDED IN PLACE ATTACHMENT BRACKETS AND CRIMPED IN PLACE.

NOTES:
1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL, SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PREHEATED, PREHEATED AND COATED WHILE HOT TO FULL CURE AND BOND. FILM COATING COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGE IS 8-10 MILS (200-250 MICRONS).
3. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. VICTOR STANLEY, INC. PLASTIC LINER LINERS ARE MOLDED ON TOOLING DESIGNED FOR AND OWNED BY VICTOR STANLEY, INC. THEY OFFER MAXIMUM CAPACITY AND STRENGTH WITH LIGHTWEIGHT CONSTRUCTION USING CRITICAL MOLDED REEL, INTERNAL HANDLES, AND HIGH-STRENGTH MATERIALS. THIS MINIMIZES HANDLING DIFFICULTY AND FACILITATES EASY EMPTYING AND STORAGE WHILE MAINTAINING LONG SERVICE LIFE.
5. ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
6. FOR HIGH SALT AMBIENT CLIMATES, HOT-DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. SEE WRITTEN SPECIFICATIONS FOR DETAILS.
7. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
8. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.

FC-12
CONCOURSE SERIES

36-GALLON LITTER RECEPTACLE
SHOWN: OPTIONAL RECYCLE LD
OPTIONAL RECYCLE PLAKE

COPYRIGHT 2002 VICTOR STANLEY, INC. ALL RIGHTS RESERVED.
REV. 07/02 DRAWN: L.D.L. 2002-064

2 RECYCLING RECEPTACLE
L531 SECTION

NTS

VICTOR

SECURE SITE DESIGN™ L.L.C.
(A VICTOR STANLEY, INC.® affiliate)

TOLL FREE (USA & CANADA): 1-888-ANTI-RAM (888-269-4726)
410-286-3375 - FAX: 410-479-0175
P.O. BOX 307, DUNKIRK, MD 20754 USA
WWW.SECURESITEDESIGN.COM

WELDS ARE GRIND SMOOTH AND POLISHED BEFORE FINISH IS APPLIED
1-5/8" TUBULAR SOLID STEEL RING
3" O.D. TUBULAR STEEL PIPE
A STEEL ANCHOR TAB IS WELDED TO THE END OF THE TUBULAR STEEL TO HELP SECURE THE ASSEMBLY TO THE CONCRETE FOOTING
RECOMMENDED HEIGHT
19-5/8"
16-1/8"
GROUND LEVEL
MOUNTING: STANDARD IN-GROUND (AS SHOWN) AND SURFACE

AVAILABLE OPTIONS:
POWER COATING TO AVAILABLE COLORS, 2 OPTIONAL METALLIC CUSTOM COLORS INCLUDING THE RAL RANGE (AT AN ADDITIONAL COST)
ALL POWDER COAT FINISHES ARE DONE AT VICTOR STANLEY, INC. (VS) TO MATCH THE VS PRODUCT LINE (OTHER FINISHES: GALVANIZED (SPECIAL QUOTE NEEDED))

NOTES:
1. DRAWINGS NOT TO SCALE. DO NOT SCALE DRAWINGS.
2. ALL FABRICATED METAL COMPONENTS ARE STEEL, SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PREHEATED, PREHEATED AND COATED WHILE HOT TO FULL CURE AND BOND. FILM COATING COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH AVERAGE IS 8-10 MILS (200-250 MICRONS).
3. THIS SECURE SITE DESIGN, L.L.C. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
4. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
5. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.

BRBS-103
CYCLE SENTRY SERIES

BIKE RACK SHOWN: STANDARD IN-GROUND MOUNT

COPYRIGHT 2003 SECURE SITE DESIGN, L.L.C. ALL RIGHTS RESERVED.
REV. 8/8/03 DRAWN: C.R.K. 2003-882

4 BIKE RACK
L531 SECTION

NTS

K118E LUMINAIRE C/W #1 FINIAL (PAINT: GOLD) & K16 CAPITAL (PAINT: GRAY FED. STD. 595A, #24091)
PHOTO BUTTON CELL
15A/120V GFI DUPLEX RECEPTACLE C/W WEATHERPROOF COVERPLATE (PAINT: GRAY FED. STD. 595A, #24091)
KM69FC-13 JEFFERSON POLE (PAINT: GRAY FED. STD. 595A, #24091)
"CITY OF FALLS CHURCH VIRGINIA" CITY SEAL
ROADWAY
19 3/4" Ø

LUMINAIRE SPECIFICATIONS
CATALOGUE NO.: K118R-BAAR-III-V-60 OR 100(SS) -5000 OR 8000-120-277V-K16-SST
QUANTITY: ROTOLOCK
GLOBE MOUNTING: BAFFLED ARRAY ACRYLIC RIPPLED
OPTICAL SYSTEM: TYPE III/V
IES CLASS.: 60W OR 100W
INPUT WATTAGE: SOLID STATE LIGHTING
SERIES: 5000 OR 8000
CCT: 4500K
LINE VOLTAGE: 120-277V
POLE ADAPTOR: K16
PAINT: TEXTURED BLACK
OPTIONS: SOLID SPUN TOP

BALLAST SPECIFICATIONS
SUPPLIED ELECTRONIC
BALLAST TYPE: ELECTRONIC
BALLAST MANU.: -
CATALOGUE NO.: -

OTHER: 540 JOULE @ 2mS 20kA-8/20uS SURGE PROTECTION

POLE SPECIFICATIONS
CATALOGUE NO.: KM69FC-13-DR & AB
QUANTITY: KING LUMINAIRE COMPANY INC.
MATERIAL: FLTD. CAST ALUM. SHAFT CAST ALUM. BASE
PAINT: GRAY FED. STD. 595A, #24091
SHAFT TOP DIA.: 5"
OVERALL LENGTH: 13' 0"
ANCHOR BOLTS: (4) 1" x 36"
BOLT CIRCLE: 12" Ø

MANUFACTURED BY:
KING LUMINAIRE COMPANY INC.
P.O. BOX 266
1153 STATE ROUTE 46N
JEFFERSON, OH 44047
WWW.STRESSCRETE.COM

6 POLE LIGHT
L531 SECTION

NTS

KEY MAP

SCALE



PROJECT

WEST FALLS CHURCH

EYA
4800 HAMPDEN LN #300
BETHESDA, MD 20814

LANDDESIGN PROJ.# 2019111

REVISION / ISSUANCE

NO.	DESCRIPTION	DATE
1	SESP SUB01	06/08/2020

DESIGNED BY:
DRAWN BY:
CHECKED BY:

SCALE: NORTH

VERT: N/A
HORZ:

SHEET TITLE

DETAILS - FURNITURE

SHEET NUMBER

L531

